

6

5

4

3

2


1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	02/01/2024	KGLEBOVA	GUTTADAURO

LENGTH

"P1"





.48
[12.2]


2X MOLDED HOOD, STRAIN RELIEF
PVC, BLACK, M2 TOP SCREW

2X USB 3.2 MALE, TYPE CM, 3A
NICKEL PLATED

"P2"

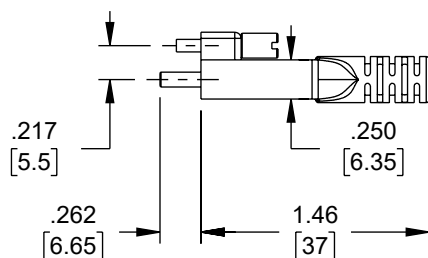

WIRING DIAGRAM

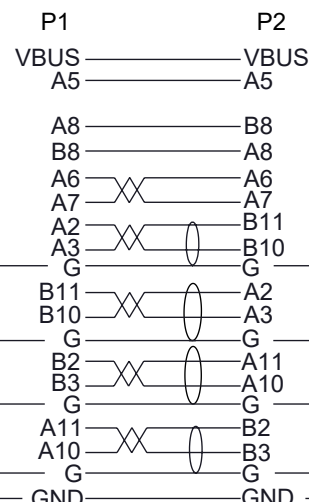

NOTES:

- CABLE: (32AWG*1P+D+AL+HM)*4C+32AWG*1P+32AWG*4C+
+24AWG*2C+F+D(24AWG), OD: 5.2mm $\pm$ 0.2 mm
JACKET: PVC, BLACK, NYLON BRAID, BLACK.

ELECTRICAL TEST:

- 100% OPEN SHORT MISS WIRE TEST
- CONTACT RESISTANCE: 5 OHM MAX.
- INSULATION RESISTANCE: 10M OHM MIN.
- HI-POT TEST: DC 300V/10 ms
- PASS 5Gbps/5V3A TEST

MISCELLANEOUS:

- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1

L-com
an INFINIT@ brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE SHEET
NONE 1 OF 1

DESCRIPTION

USB 3.2 USB C MALE TOP SCREW ON BOTH SIDES, 5V, 3A,
5GBPS

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	KGLEBOVA	CAU32CC-MLML	A