



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
C	ECN 7890: UPDATED FORMAT, PACKAGING, ROHS	4/2/15	D_DESJARDIN

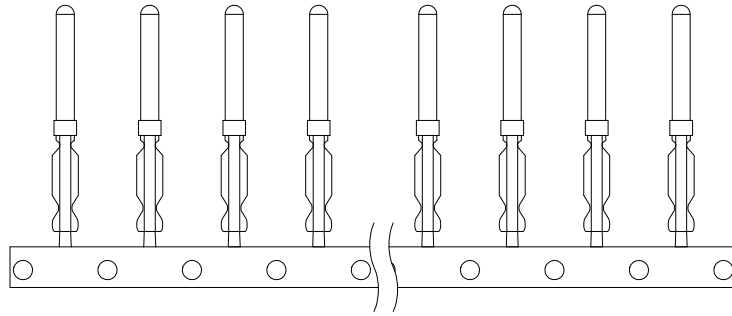

CPM
STANDARD MALE PINS, 24-28 AWG

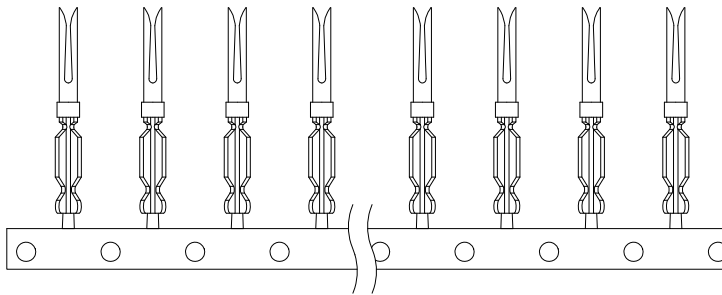

CPF
STANDARD FEMALE CONTACTS, 24-28 AWG

P/N	GENDER	QUANTITY	GOLD PLATING
CPM10	MALE	10 / STRIP	FLASH
CPF10	FEMALE	10 / STRIP	FLASH
CPM10-30U	MALE	10 / STRIP	30μINCHES
CPF10-30U	FEMALE	10 / STRIP	30μINCHES
CPM100	MALE	100 / STRIP	FLASH
CPF100	FEMALE	100 / STRIP	FLASH
CPM100-30U	MALE	100 / STRIP	30μINCHES
CPF100-30U	FEMALE	100 / STRIP	30μINCHES

NOTES:

1. 10 / STRIP CONTACTS ARE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

2. 100 / STRIP CONTACTS ARE PACKAGED IN AN APPROPRIATELY SIZED BOX IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] - 60 [1524] = +2 [51] / -0 > 60 [1524] - 120 [3048] = +4 [102] / -0 > 120 [3048] - 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .2 [5.08] .XX = .02 [.51] .XXX = .005 [.13]	APPROVALS DRAWN BY D. PARHAM CHECKED BY M. MARTINEZ APPROVED BY S. SMITH	DATE 06/18/2009 06/18/2009 06/18/2009			45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY D-SUBMINIATURE	PRODUCT DESCRIPTION CRIMP CONTACT	
	SIZE A	FSCM NO. 43321	DWG. NO. CPF10	REV. C	SCALE: 2:1 CAD FILE: CPF10.SLDDRW SHEET 1 OF 1