

6

5

4

3

2

1

## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/29/2026	SLI	WLI

F

F

E

E

D

D

C

C

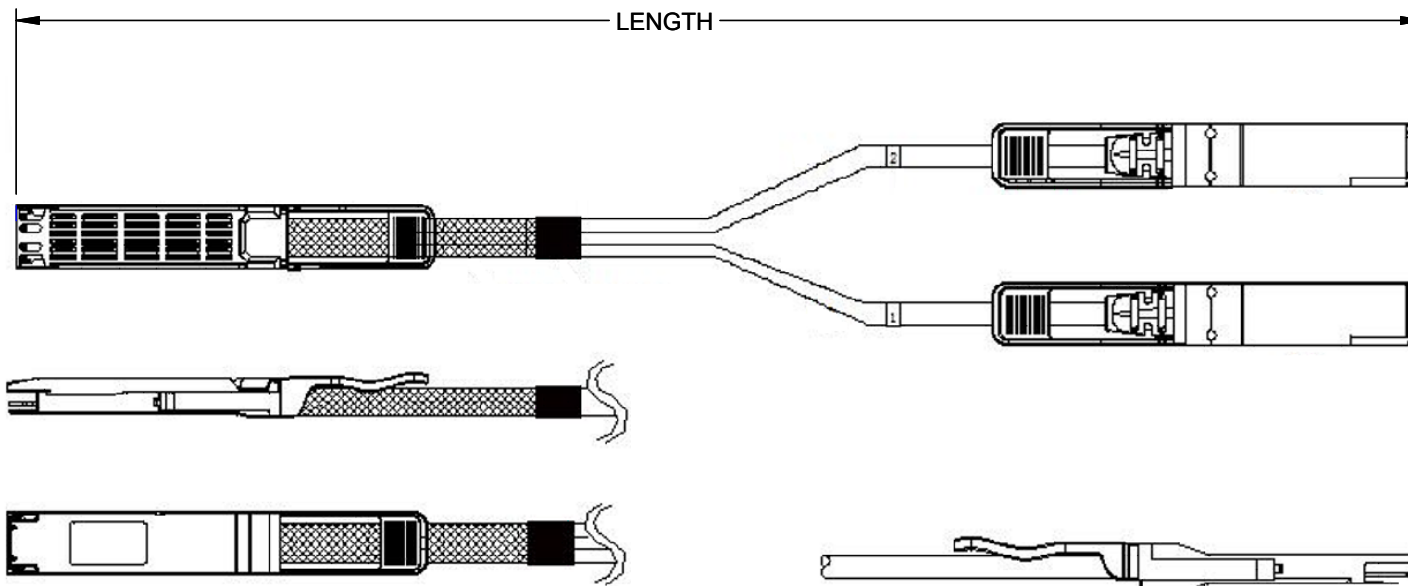
B

B

A

A

30 31  
1 60

PART NUMBER	TYPE	DATA RATE	CONNECTOR TYPE	WIRE GAUGE	LENGTH
DAC-OS8HMSA-2QS-1M	PASSIVE	800Gbps	OSFP/QSFP112	30 AWG	1.0 METERS
DAC-OS8HMSA-2QS-2M	PASSIVE	800Gbps	OSFP/QSFP112	26 AWG	2.0 METERS
DAC-OS8HMSA-2QS-3M	PASSIVE	800Gbps	OSFP/QSFP112	26 AWG	3.0 METERS

**NOTES:**

- 1a. STORAGE TEMP: -40°C TO +85°C.  
 1b. OPERATING CASE TEMP: 0°C TO +70°C.  
 1c. POWER SUPPLY VOLTAGE (V<sub>cc</sub>): 3.13V MIN, 3.3V TYP., 3.47V MAX.  
 1d. POWER DISSIPATION: 0.1W MAX.

2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

**REGULATORY COMPLIANCE:**  
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
 LEADING DIMENSIONS ARE INCHES  
 DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5]  
 .XX = ±.02 [0.5]  
 .XXX = ±.005 [0.13]  
 FRACTIONS  
 ± 1/32  
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
 ≤12 [305] = +1 [25] / -0  
 >12 [305] ≤ 60 [1524] = +2 [51] / -0  
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0  
 >300 [7620] = +5% / -0  
 CABLE LENGTH TOL IAW IPC A-620

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
 AND SUBJECT TO CHANGE WITHOUT NOTICE.  
 UN-DIMENSIONED/NON-CRITICAL FEATURES  
 MAY VARY IN SIZE AND LOCATION  
 COLORS MAY VARY

**L-com**  
 an INFINITE company

Website: [www.L-com.com](http://www.L-com.com)  
 Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
 TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
800Gbps OSFP to 2x400G QSFP112 DAC, 0~70°C				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	SLI	DAC-OS8HMSA-2QS	A

6

5

4

3

2

1