

6

5

4

3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/29/2026	SLI	WLI

F

E

D

C

B

A

F

E




D

C

B

A

LENGTH

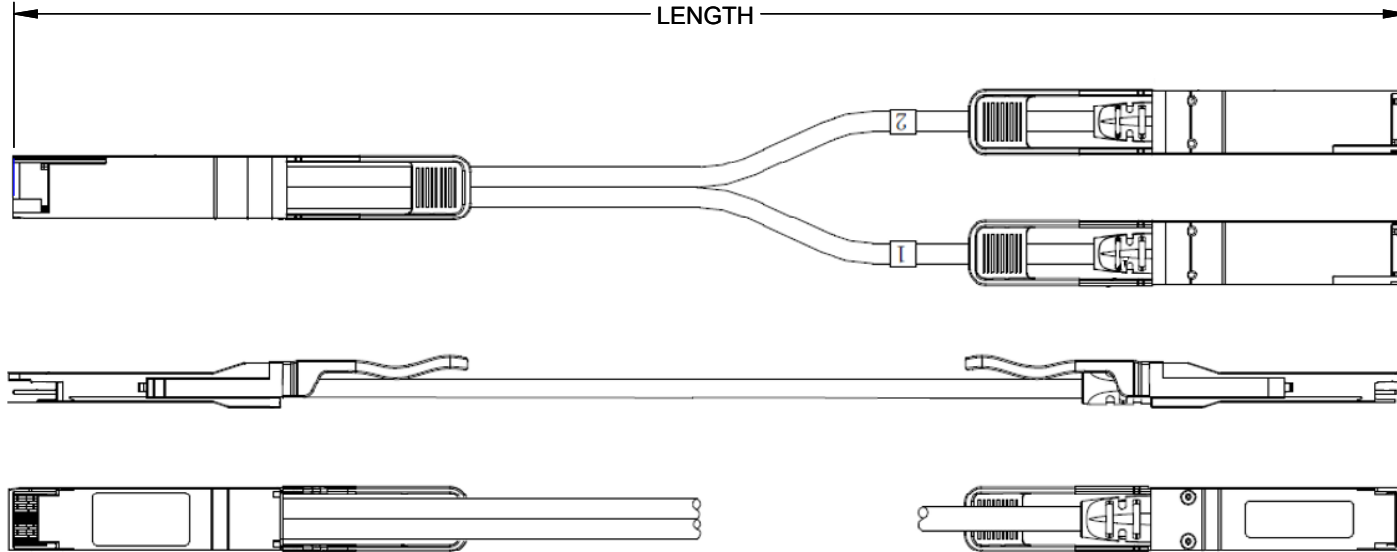

PART NUMBER	TYPE	DATA RATE	CONNECTOR TYPE	WIRE GAUGE	LENGTH
DAC-QD4HMSA-2QS-1M	PASSIVE	400Gbps	QSFP-DD/QSFP56	30 AWG	1.0 METERS
DAC-QD4HMSA-2QS-2M	PASSIVE	400Gbps	QSFP-DD/QSFP56	28 AWG	2.0 METERS
DAC-QD4HMSA-2QS-3M	PASSIVE	400Gbps	QSFP-DD/QSFP56	28 AWG	3.0 METERS

NOTES:

- 1a. STORAGE TEMP: -40°C TO +85°C.
 1b. OPERATING CASE TEMP: 0°C TO +70°C.
 1c. POWER SUPPLY VOLTAGE (Vcc): 3.13V MIN, 3.3V TYP., 3.47V MAX.
 1d. POWER DISSIPATION: 0.1W MAX.

2. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
 LEADING DIMENSIONS ARE INCHES
 DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
 .X = ±.2 [5]
 .XX = ±.02 [0.5]
 .XXX = ±.005 [0.13]
 FRACTIONS
 ± 1/32
 ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0
 CABLE LENGTH TOL IAW IPC A-620

ALL DIMENSIONS ARE FOR REFERENCE ONLY
 AND SUBJECT TO CHANGE WITHOUT NOTICE.
 UN-DIMENSIONED/NON-CRITICAL FEATURES
 MAY VARY IN SIZE AND LOCATION
 COLORS MAY VARY

L-com
 an INFINITE company

Website: www.L-com.com
 Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
 TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
400Gbps QSFP-DD to 2x200G QSFP56 DAC, 0~70°C				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	SLI	DAC-QD4HMSA-2QS	A

6

5

4

3

2

1