

6

5


4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/29/2025	TUFRERE	DGUST

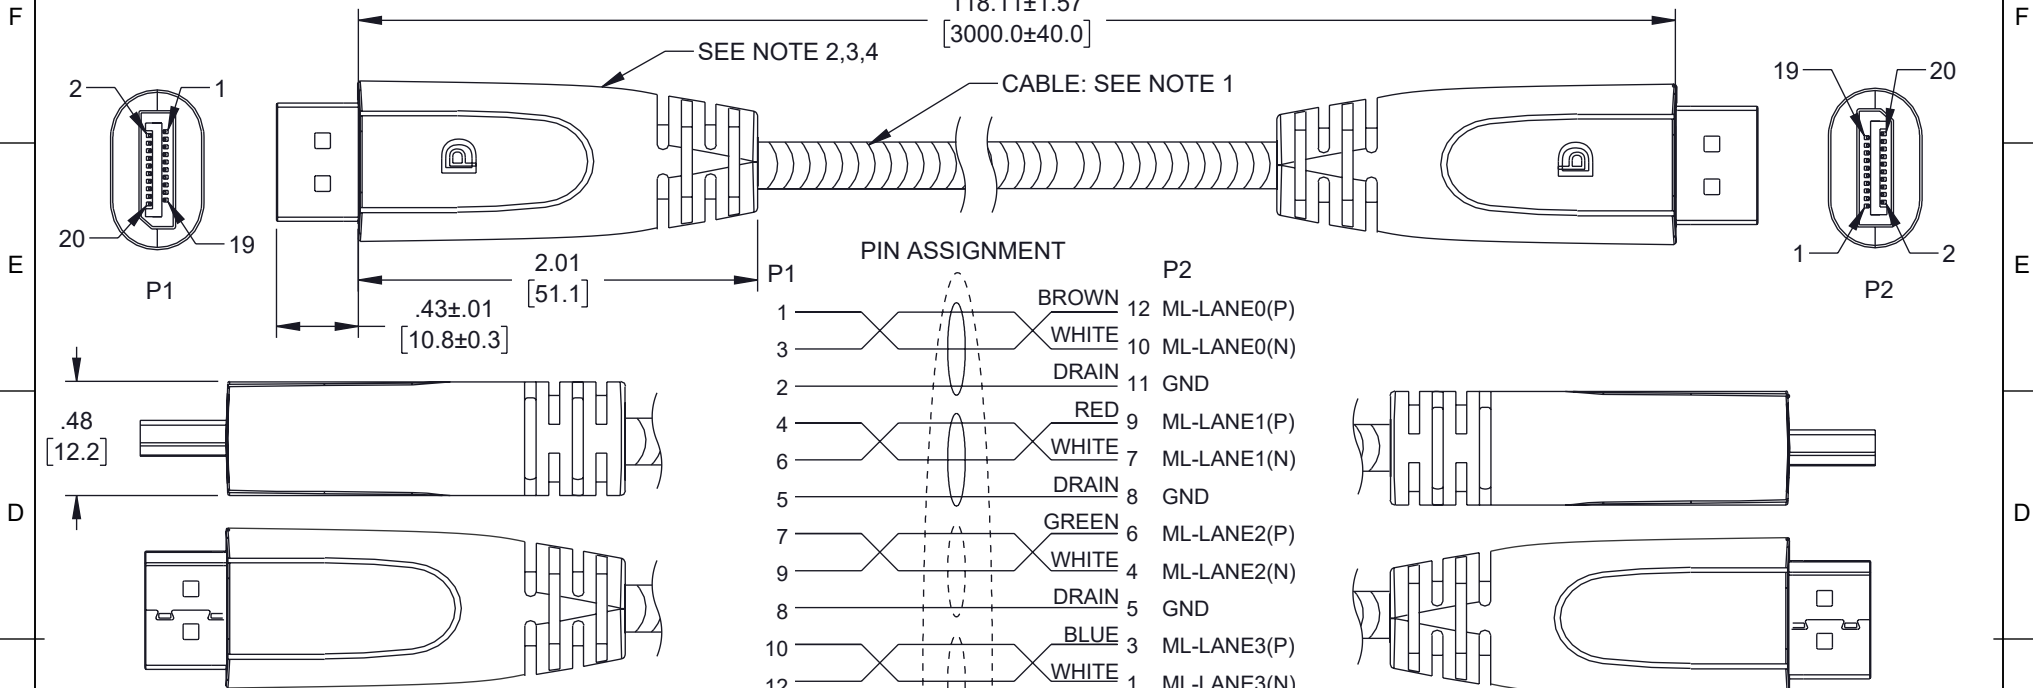

NOTES:

- CABLE:{28AWGX1P+DAM}X5+28AWGX4C+ADB Ø6.5MM PVC JACK BLACK ARMORED OD:8.5MM.
- DP/M PIN:G/F SHELL:G/F INSULATOR:BLACK WITHOUT HOOK
- PE LOW DENSITY
- PVC 45PA BLACK UL94V-0
- 100% OPEN, SHORT & MISWIRE TEST.
- CONDUCTIVE RESISTANCE 3Ω/MAX.
- INSULATION RESISTANCE 10MΩ/MIN AT DC300V/10MS.
- REACH TO SUPPORT 8K@60HZ.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

PIN ASSIGNMENT	
P1	P2
1	BROWN 12 ML-LANE0(P)
3	WHITE 10 ML-LANE0(N)
2	DRAIN 11 GND
4	RED 9 ML-LANE1(P)
6	WHITE 7 ML-LANE1(N)
5	DRAIN 8 GND
7	GREEN 6 ML-LANE2(P)
9	WHITE 4 ML-LANE2(N)
8	DRAIN 5 GND
10	BLUE 3 ML-LANE3(P)
12	WHITE 1 ML-LANE3(N)
11	DRAIN 2 GND
15	BLACK 15 AUX-CH(P)
17	DRAIN 17 AUX-CH(N)
16	DRAIN 16 GND
13	RED 13 GND
14	YELLOW 14 GND
18	WHITE 18 HPD
19	ORANGE 19 RETURN DP-POWER
20	NO CONNECTION 20 NO CONNECTION
SHELL	BRAID+DRAIN SHELL

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:	
X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:	
≤12 [305]	= +1 [25] / -0
>12 [305] ≤ 60 [1524]	= +2 [51] / -0
>60 [1524] ≤ 120 [3048]	= +4 [102] / -0
>120 [3048] ≤ 300 [7620]	= +6 [152] / -0
>300 [7620]	= +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED (NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY

L-com
an INFINIT® brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
SCALE	SHEET
NONE	1 OF 1

DESCRIPTION		ARMORED DP CA, 8K, 3M	
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	TUFRERE	DP8KA-3M
			REV
			A

6

5

4

3

2

1