



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/18/2022	PHOSPODAR

LENGTH		OPTICAL SPECIFICATION		
LENGTH METER [FEET]	TOLERANCE MM [INCHES]	FIBER TYPE	MULTIMODE	
		CONNECTOR TYPE	IP-MPO/UPC	LC/UPC
1 [3.28]	+50/-0 [+1.97/0]	INSERTION LOSS	$\leq 0.75\text{dB}$	$\leq 0.30\text{dB}$
3 [9.84]	+100/-0 [+3.94/0]	RETURN LOSS	$\geq 25\text{dB}$	$\geq 25\text{dB}$
5 [16.40]	+100/-0 [+3.94/0]	TEST WAVELENGTH	850 & 1300nm	

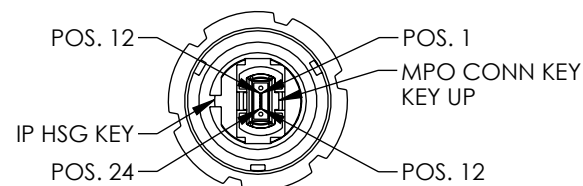

VIEW A-A

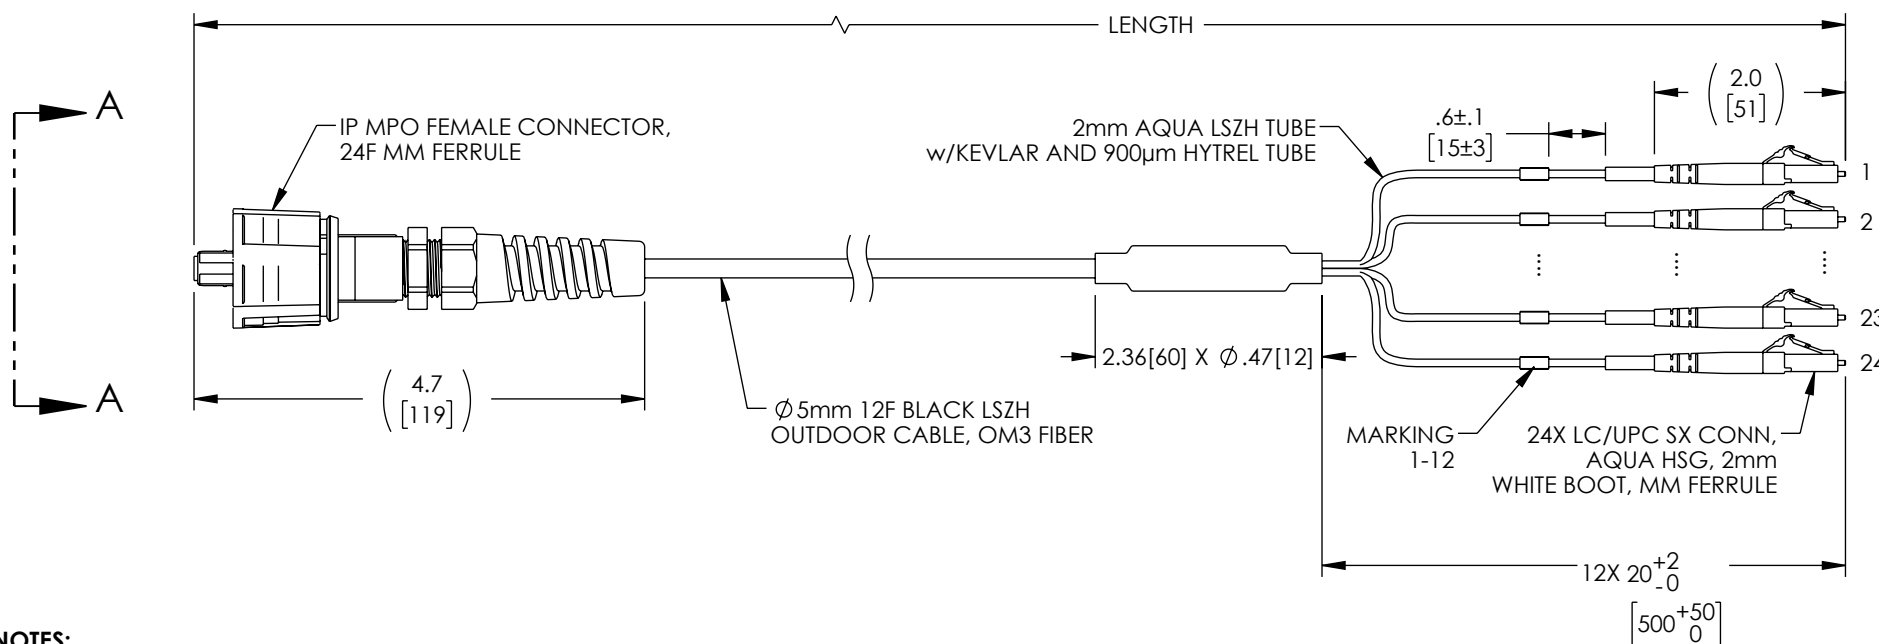


NOTES:

1. MPO CONNECTOR ASSEMBLY POLISH TYPE: UPC
LC CONNECTOR ASSEMBLY POLISH TYPE: UPC.
2. ALL CONNECTORS ACCOMPANIED WITH A DUST CAP INSTALLED (NOT SHOWN).
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IAW L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS	DATE	 an INFINITI® brand		50 High Street, West Mill, North Andover, MA 01845 USA Phone: 1.800.341.5266 1.978.682.6936		
OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DRAWN BY DZINN	10/18/2022		CATEGORY FIBER OPTIC			
		CHECKED BY DMAY	10/18/2022					
		APPROVED BY REVANGELIS	10/18/2022					
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ± 1° .XXX = ±.005 [.13]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION IP68 OUTDOOR CABLE ASSY, 5MM OD OM3, MPO/UPC FEMALE 24F TO LC/UPC FAN-OUT				
THIRD-ANGLE PROJECTION 		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 43321	ITEM NO. FOCM30DMPFBLCU24		REV. A
				SCALE: NONE	CAD FILE: FOCM30DMPFBLCU24.SLDDRW			SHEET 1 OF 1