



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	02/01/2024	BZHANG	WLI

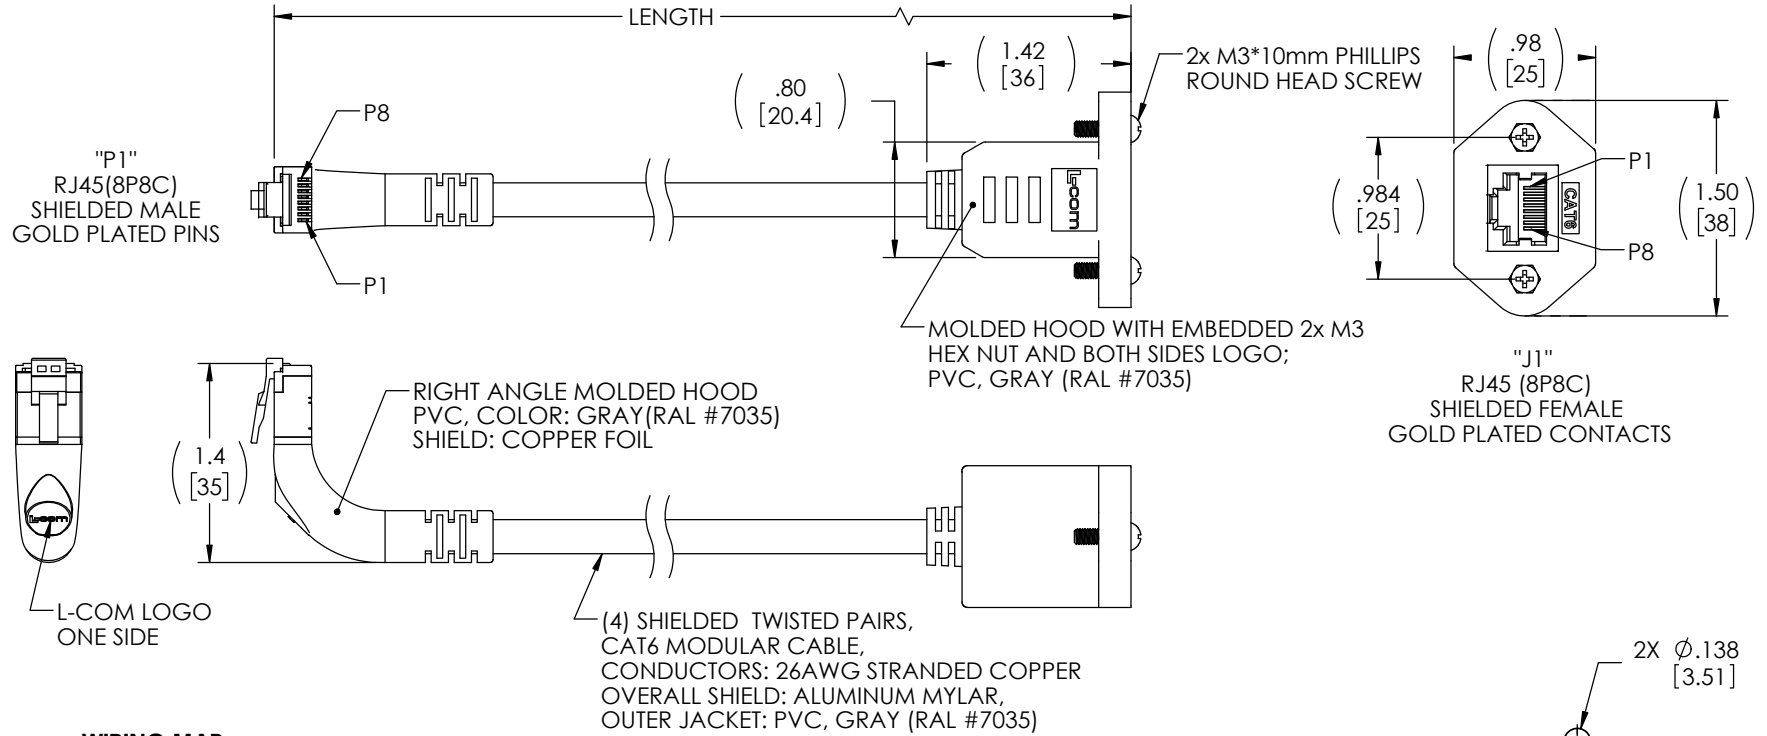

WIRING MAP

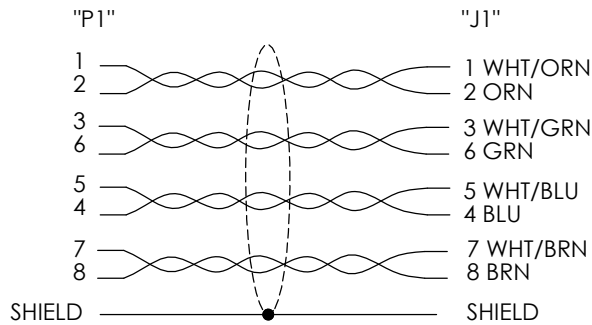

PART NUMBER	LENGTH	
	METERS	FEET
LCC101002-U-0.5M	0.50	1.64
LCC101002-U-0.75M	0.75	2.46
LCC101002-U-1M	1.00	3.28
LCC101002-U-1.5M	1.50	4.92
LCC101002-U-2M	2.00	6.56

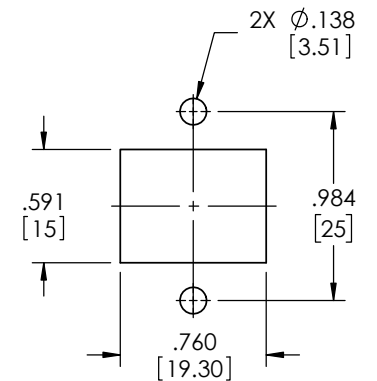

RECOMMENDED PANEL CUTOUT

NOTES:

1. MODULAR CONNECTOR TO MEET TIA-1096.
2. CABLE ASSEMBLY TO BE SHIPPED WITH (2) M3 X 10mm LONG PHILLIPS ROUND HEAD SCREWS
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE	
OVERALL CABLE LENGTH TOLERANCES:		DRAWN BY BZHANG		12/25/2023	
<12 [305] = +1 [25] / -0		CHECKED BY WLI		12/25/2023	
>12 [305] <60 [1524] = +2 [51] / -0		APPROVED BY WLI		12/25/2023	
>60 [1524] <120 [3048] = +4 [102] / -0		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	
>120 [3048] <300 [7620] = +6 [152] / -0		COLOR VARIATIONS MAY OCCUR		C6 RJ45 FIANGE MNT F SHLD/90° UP M FTP PVC GRY	
>300 [7620] = +5% / -0		THIRD-ANGLE PROJECTION		SIZE A	
ALL OTHER DIMENSIONAL TOLERANCES:		REF		CAGE CODE 43321	
.X = ± .2 [5]		SCALE: NONE		ITEM NO. LCC101002-U	
.XX = ± .02 [5]		CAD FILE: LCC101002-U.SLDDRW		REV. A	
.XXX = ± .005 [13]		SHEET 1 OF 1			
FRACTIONS ± 1/32					
ANGLES ± 1°					