


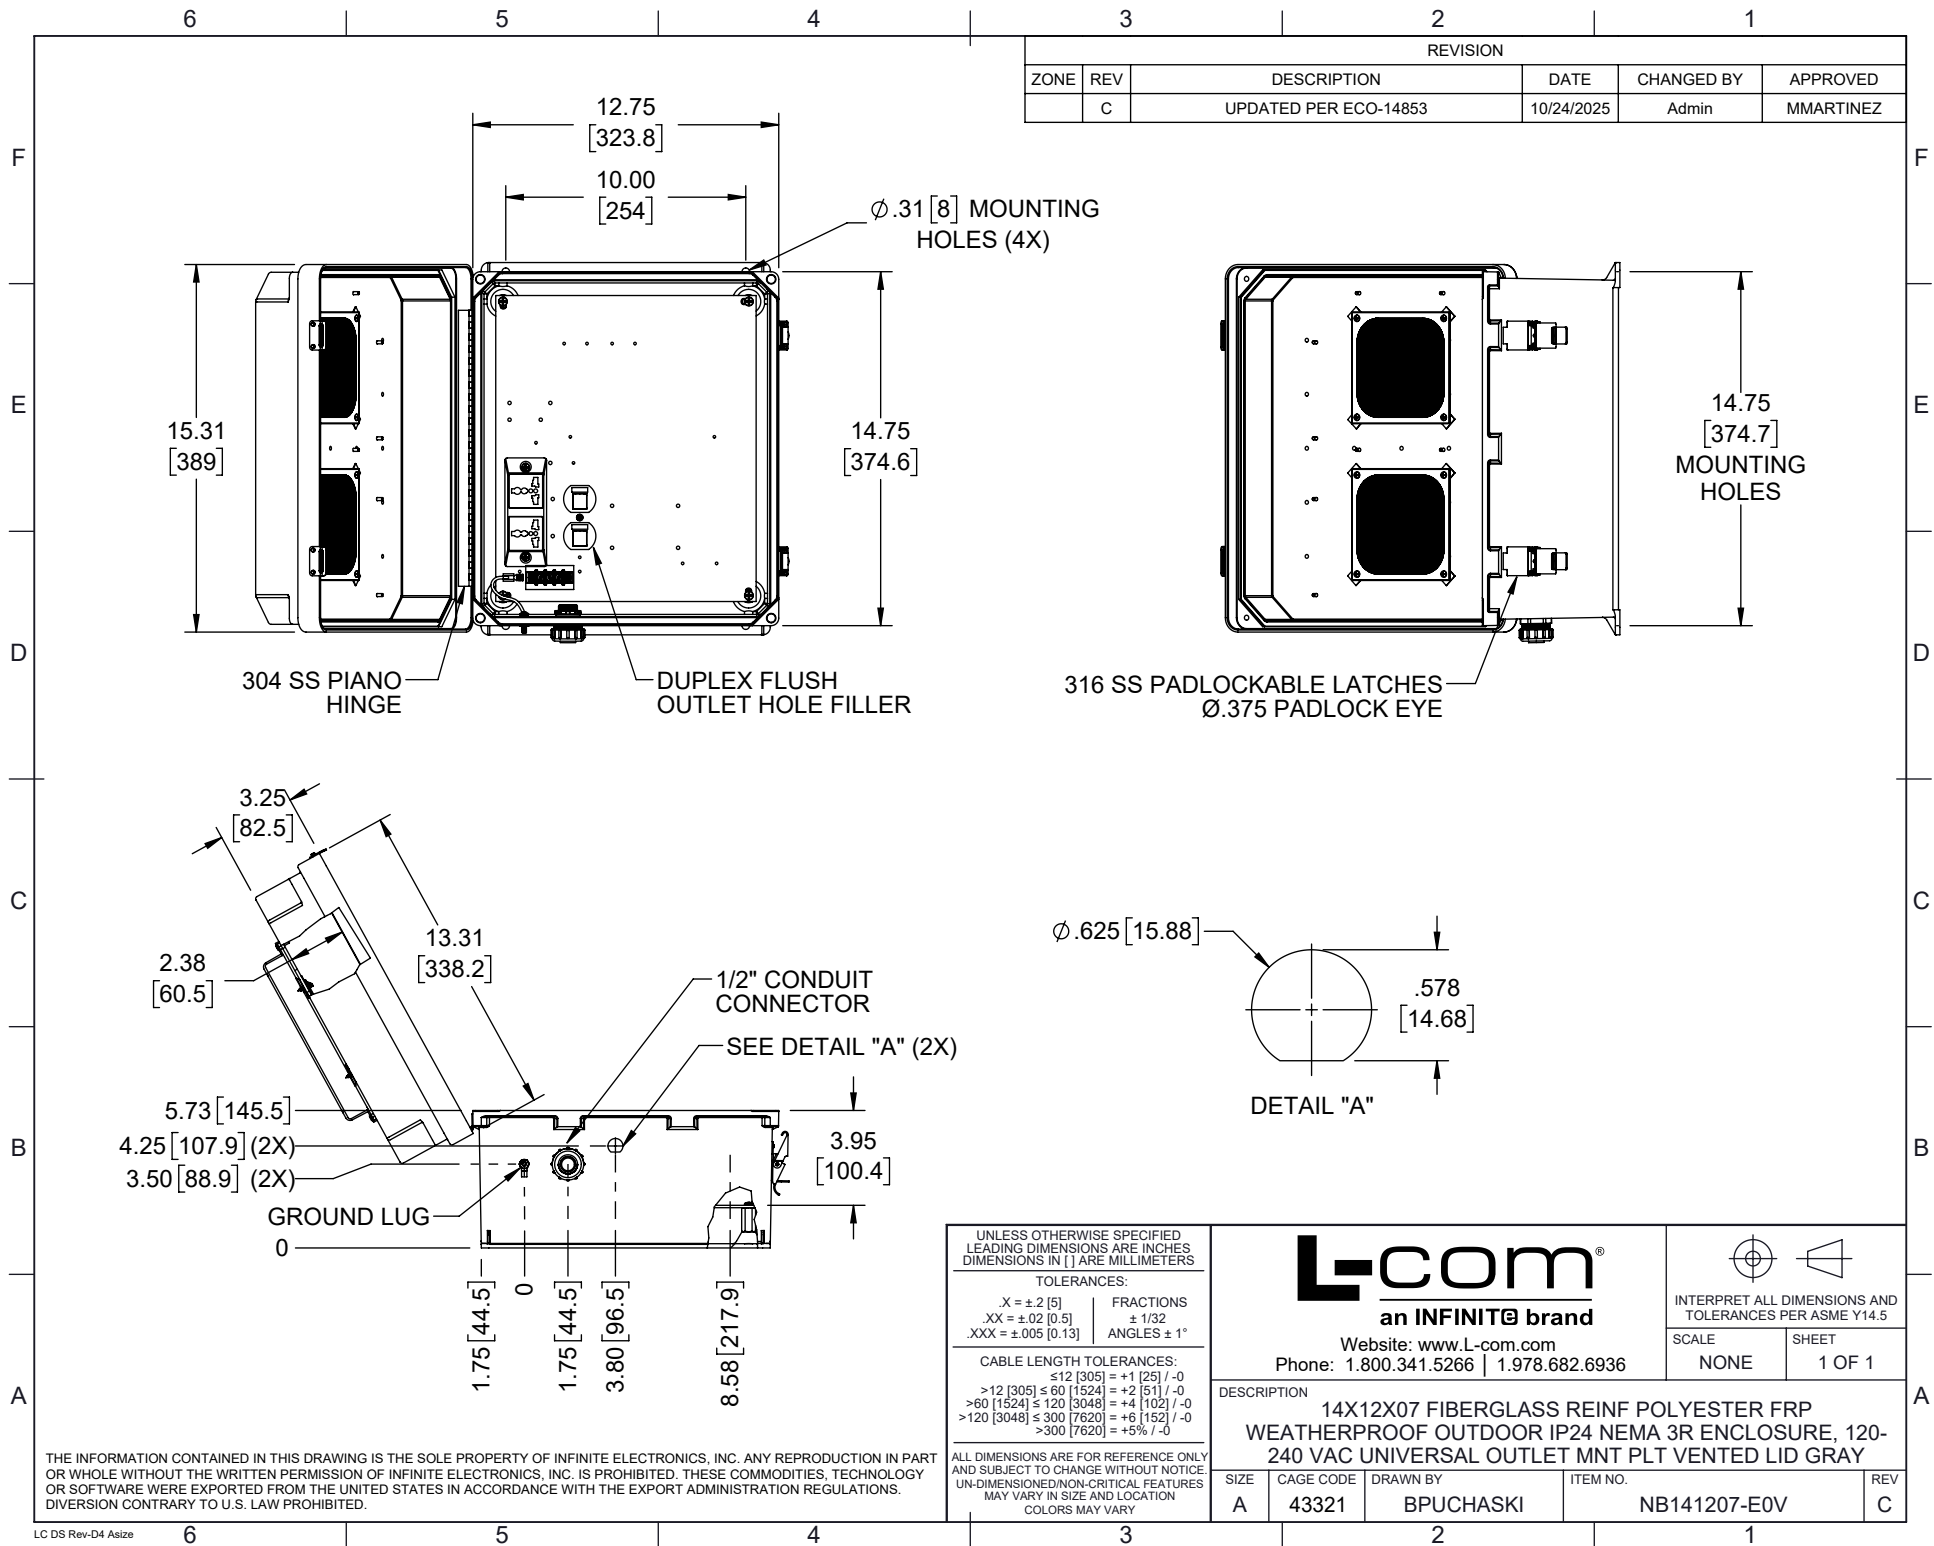

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	C	UPDATED PER ECO-14853	10/24/2025	Admin	MMARTINEZ

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	
X = ±.2 [5]	FRACTIONS ± 1/32
XX = ±.02 [0.5]	ANGLES ± 1°
XXX = ±.005 [0.13]	
CABLE LENGTH TOLERANCES:	
≤12 [305] = +1 [25] / -0	
>12 [305] ≤ 60 [1524] = +2 [51] / -0	
>60 [1524] ≤ 120 [3048] = +4 [102] / -0	
>120 [3048] ≤ 300 [7620] = +6 [152] / -0	
>300 [7620] = +5% / -0	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION COLORS MAY VARY	

L-com an INFINIT® brand Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936			INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
DESCRIPTION 14X12X07 FIBERGLASS REINF POLYESTER FRP WEATHERPROOF OUTDOOR IP24 NEMA 3R ENCLOSURE, 120- 240 VAC UNIVERSAL OUTLET MNT PLT VENTED LID GRAY			SCALE NONE	SHEET 1 OF 1
SIZE A	CAGE CODE 43321	DRAWN BY BPUCHASKI	ITEM NO. NB141207-E0V	REV C