


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE  
PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE  
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISION |     |             |           |            |           |
|----------|-----|-------------|-----------|------------|-----------|
| ZONE     | REV | DESCRIPTION | DATE      | CHANGED BY | APPROVED  |
|          | B   | ECO-13049   | 9/13/2023 | DMAY       | THOUGHTON |

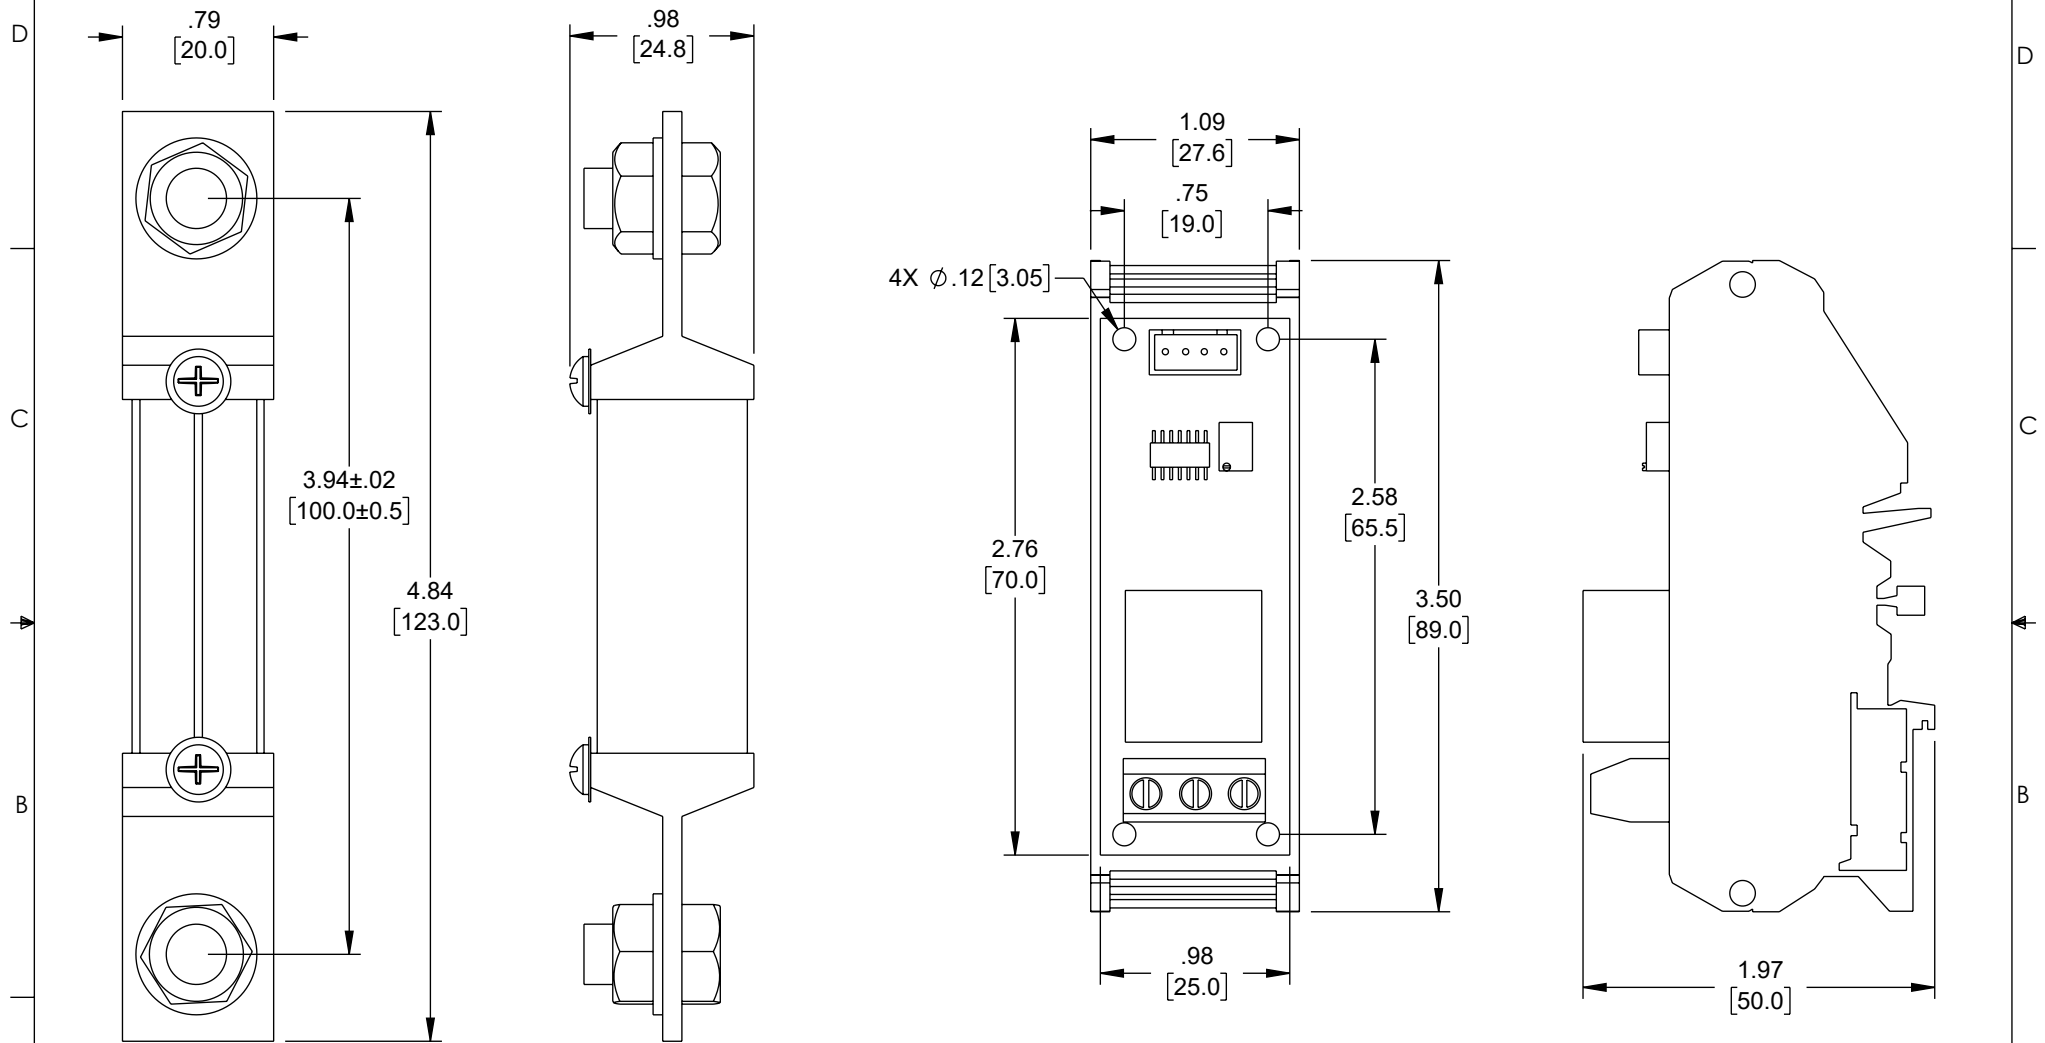

NOTES:

1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
2. NOT ALL COMPONENTS SHOWN FOR CLARITY.

|                                                                                                                                                                                                                   |  |                               |  |                                                                                    |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------|--|------------------------------------------------------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONS ARE IN INCHES [mm]                                                                                                                                                      |  | APPROVALS                     |  | DATE                                                                               |  |
| OVERALL CABLE LENGTH TOLERANCE:<br>≤12 [305] = +1 [25] / -0<br>>12 [305] ≤60 [1524] = +2 [51] / -0<br>>60 [1524] ≤120 [3048] = +4 [102] / -0<br>>120 [3048] ≤300 [7620] = +6 [152] / -0<br>>300 [7620] = +5% / -0 |  | DRAWN BY<br>DMAY              |  | 4/7/2022                                                                           |  |
| ALL OTHER DIMENSIONAL TOLERANCES:<br>.X = ±.2 [5]   FRACTIONS<br>.XX = ±.02 [.5]   ± 1/32<br>.XXX = ±.005 [.13]   ANGLES ± 1°                                                                                     |  | CHECKED BY<br>HBAKKE          |  | 04/07/2022                                                                         |  |
| THIRD-ANGLE PROJECTION                                                                                                                                                                                            |  | APPROVED BY<br>THOUGHTON      |  | 05/06/2022                                                                         |  |
| CONFIGURATION DETAILS OF<br>UNDIMENSIONED FEATURES<br>MAY VARY                                                                                                                                                    |  | COLOR VARIATIONS<br>MAY OCCUR |  | PRODUCT DESCRIPTION<br>ISOLATED DC CURRENT SHUNT CURRENT<br>SENSOR, 0-300A, DC 12V |  |
| SIZE<br>A                                                                                                                                                                                                         |  | CAGE CODE<br>43321            |  | ITEM NO.<br>SRCN-C415-2                                                            |  |
| SCALE: NONE                                                                                                                                                                                                       |  | CAD FILE: SRCN-C415-2.SLDDRW  |  | REV.<br>B                                                                          |  |