

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	CN INITIAL RELEASE	06/28/2023	BZHANG	WLI

D

C

B

A

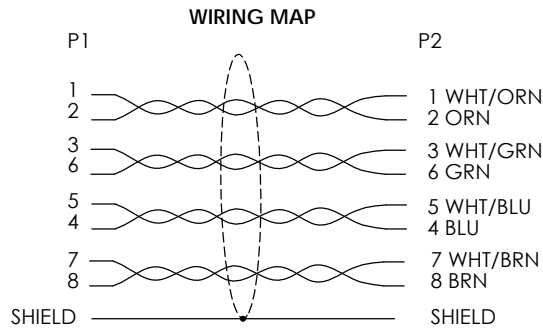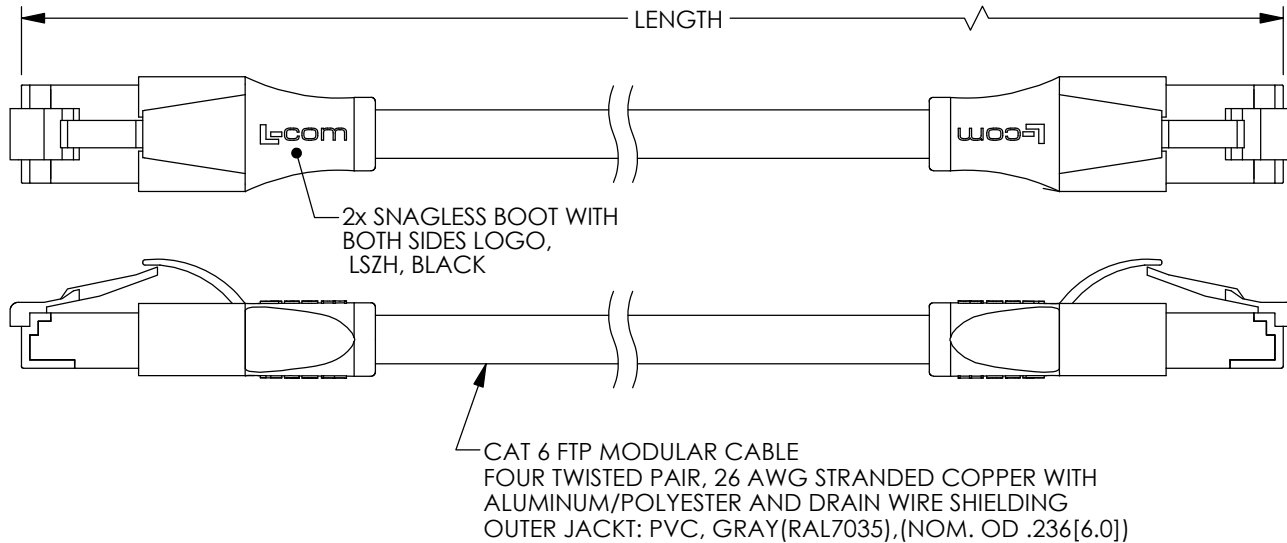


NOTES:

- 1.PLUG CONFORMS TO TIA-1096.
- 2.OPERATING TEMPERATURE RANGE: -10°C TO +75°C.
- 3.CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- 3.CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

MODEL NO.	JACKET COLOR	LENGTH	
		METERS	FEET
TRD695SCR-1M	GRAY	1.0	3.28
TRD695SCR-2M	GRAY	2.0	6.56
TRD695SCR-3M	GRAY	3.0	9.84
TRD695SCR-4M	GRAY	4.0	13.12
TRD695SCR-5M	GRAY	5.0	16.41
TRD695SCR-7M	GRAY	7.0	22.97
TRD695SCR-10M	GRAY	10.0	32.81
TRD695SCR-12M	GRAY	12.0	39.37
TRD695SCR-15M	GRAY	15.0	49.22
TRD695SCR-20M	GRAY	20.0	65.62
TRD695SCR-25M	GRAY	25.0	82.02
TRD695SCR-30M	GRAY	30.0	98.43

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div><div>an INFINITI™ brand</div></div> <div>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</div>	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY BZHANG		06/21/2023			
≤12 [305] = +1 [25] / -0		CHECKED BY WLI		06/21/2023			
>12 [305] ≤60 [1524] = +2 [51] / -0		APPROVED BY WLI		06/21/2023			
>60 [1524] ≤120 [3048] = +4 [102] / -0				CATEGORY		TELECOM/MODULAR	
>120 [3048] ≤300 [7620] = +6 [152] / -0							
>300 [7620] = +5% / -0							
ALL OTHER DIMENSIONAL TOLERANCES:		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION			
.X = ± .2 [5] .XX = ± .02 [.5] .XXX = ± .005 [.13]		FRACTIONS ± 1/32 ANGLES ± 1°		CA RJ45/RJ45 CAT6 SHILD PVC			
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR		SIZE A	CAGE CODE 43321	ITEM NO. TRD695SCR-xxM	REV. A
		REF		SCALE: NONE		CAD FILE: TRD695SCR-xxM.SLDDRW	SHEET 1 OF 1