



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	CN INITIAL RELEASE	01/09/2024	BZHANG	WLI


L-COM LOGO
ONE SIDE

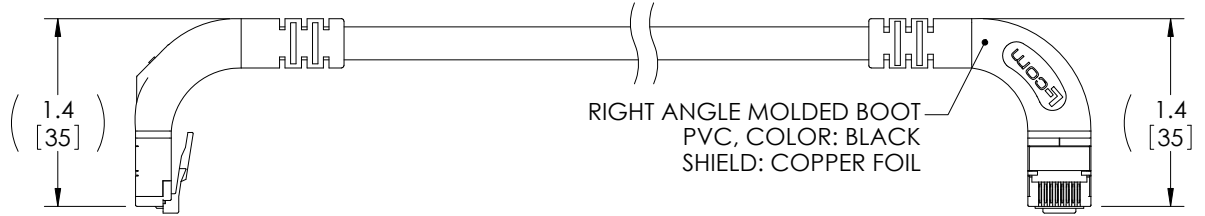


P1
SHIELDED RJ45 MODULAR PLUG
GOLD PLATED CONTACTS
(8P8C)

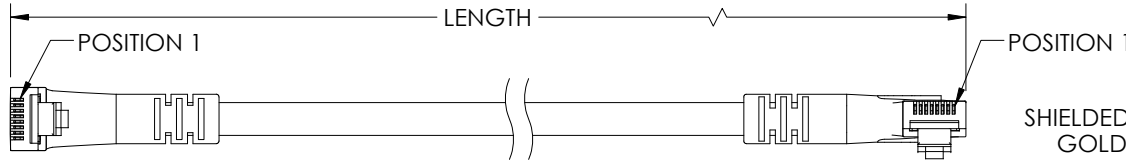

P2
SHIELDED RJ45 MODULAR PLUG
GOLD PLATED CONTACTS
(8P8C)

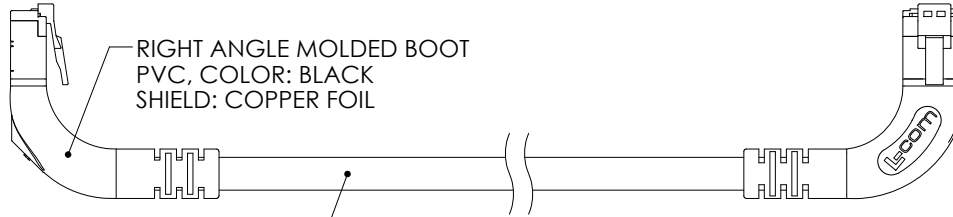

FOUR SHIELDED TWISTED PAIRS, CATEGORY 5E
26 AWG STRANDED COPPER WITH
ALUMINUM/POLYESTER SHIELDING AND DRAIN WIRE
CABLE JACKET: PVC, BLACK, NOM DIAM. .217[5.50]

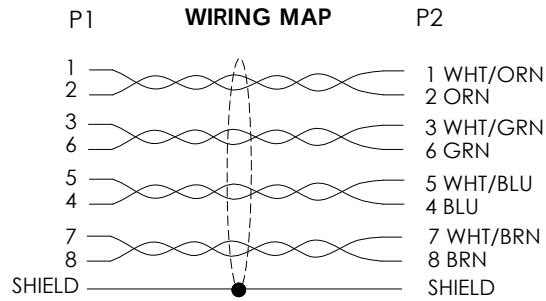


PART NUMBER	LENGTH METERS [FEET]
TRD815SRA10BLK-0.4M	0.4[1.31]
TRD815SRA10BLK-0.5M	0.5[1.64]
TRD815SRA10BLK-1M	1.0[3.28]
TRD815SRA10BLK-1.5M	1.5[4.92]
TRD815SRA10BLK-2M	2.0[6.56]
TRD815SRA10BLK-2.5M	2.5[8.20]
TRD815SRA10BLK-3M	3.0[9.84]
TRD815SRA10BLK-5M	5.0[16.40]
TRD815SRA10BLK-7M	7.0[22.97]
TRD815SRA10BLK-10M	10.0[32.81]

NOTES:

1. PLUG CONFORMS TO TIA-1096
2. OPERATING TEMPERATURE RANGE: -10°C TO +75°C
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITI® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY BZHANG		01/05/2024			
ALL OTHER DIMENSIONAL TOLERANCES:		CHECKED BY WLI		01/05/2024			
THIRD-ANGLE PROJECTION		APPROVED BY WLI		01/05/2024			
.X = ± .2 [5] .XX = ± .02 [.5] .XXX = ± .005 [.13]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION		CATEGORY	
				C5E PVC FTP RGT-DWNM BLK		TELECOM/MODULAR	
		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321	
				ITEM NO. TRD815SRA10BLK-xxM		REV. A	
				SCALE: NONE		CAD FILE: TRD815SRA10BLK-xxM.SLDDRW	
						SHEET 1 OF 1	