

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	CN INITIAL RELEASE	01/09/2024	BZHANG	WLI

D





C

B

A

A

T-Rev.D1

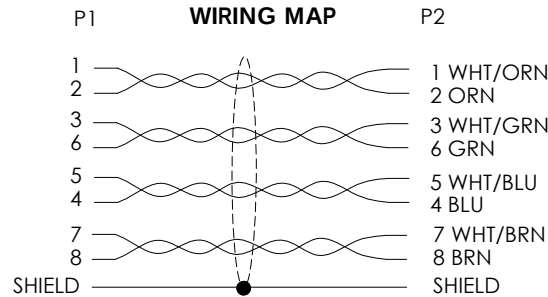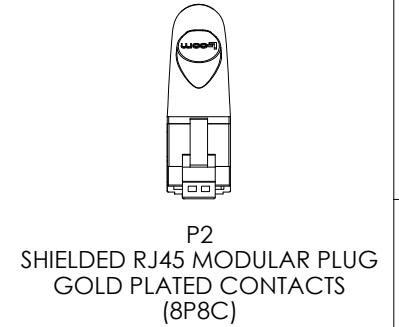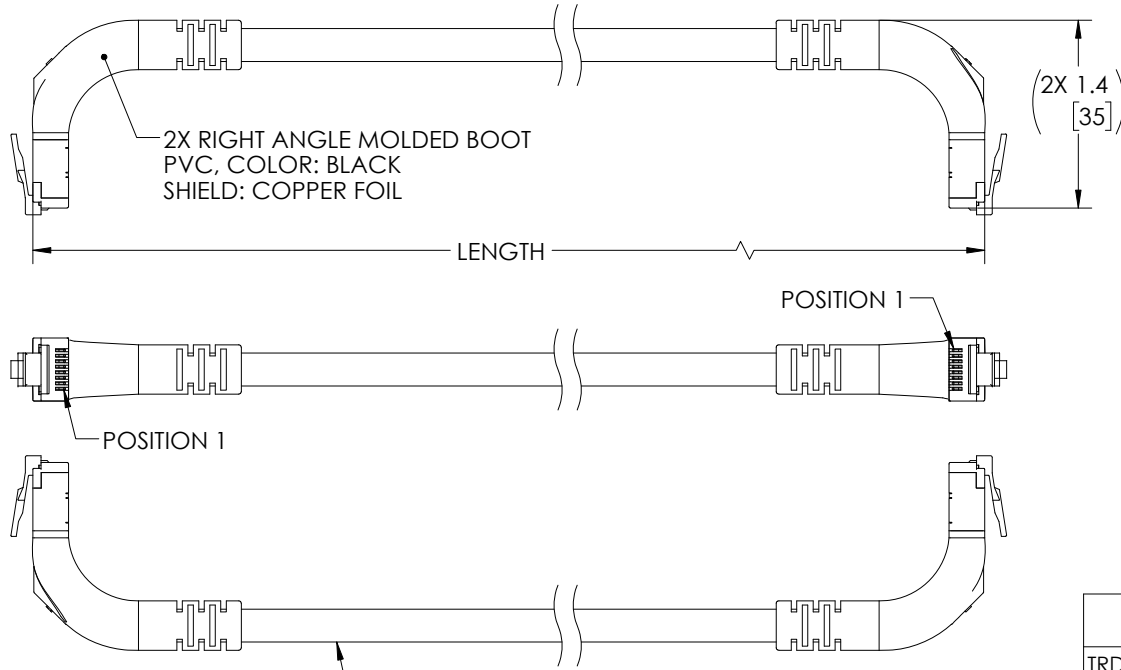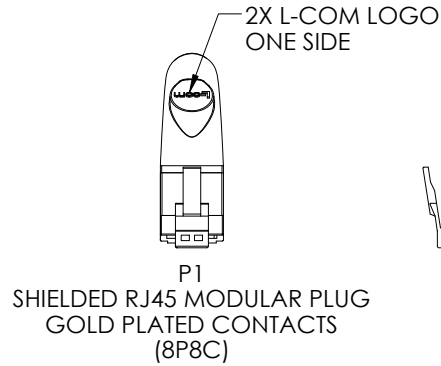

FOUR SHIELDED TWISTED PAIRS, CATEGORY 5E
26 AWG STRANDED COPPER WITH
ALUMINUM/POLYESTER SHIELDING AND DRAIN WIRE
CABLE JACKET: PVC, BLACK, NOM DIAM. .217[5.50]

PART NUMBER	LENGTH METERS[FEET]
TRD815SRA5BLK-0.15M	0.15[0.49]
TRD815SRA5BLK-0.5M	0.5[1.64]
TRD815SRA5BLK-0.7M	0.7[2.30]
TRD815SRA5BLK-1M	1.0[3.28]
TRD815SRA5BLK-1.5M	1.5[4.92]
TRD815SRA5BLK-2M	2.0[6.56]
TRD815SRA5BLK-2.5M	2.5[8.20]
TRD815SRA5BLK-3M	3.0[9.84]
TRD815SRA5BLK-5M	5.0[16.40]
TRD815SRA5BLK-7M	7.0[22.97]
TRD815SRA5BLK-10M	10.0[32.81]

NOTES:

1. PLUG CONFORMS TO TIA-1096
2. OPERATING TEMPERATURE RANGE: -10°C TO +75°C
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		 an INFINITT® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY BZHANG		01/05/2024			
ALL OTHER DIMENSIONAL TOLERANCES:		CHECKED BY WLI		01/05/2024			
THIRD-ANGLE PROJECTION		APPROVED BY WLI		01/05/2024			
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR		CATEGORY TELECOM/MODULAR		PRODUCT DESCRIPTION C5E PVC FTP UP-UP BLK	
SIZE A		CAGE CODE 43321		ITEM NO. TRD815SRA5BLK-xxM		REV. A	
SCALE: NONE		CAD FILE: TRD815SRA5BLK-xxM.SLDRW				SHEET 1 OF 1	