

6

5

4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	05/08/2026	BZHANG	WLI

F

E

D

C

B

A

F


E

D

C

B

A

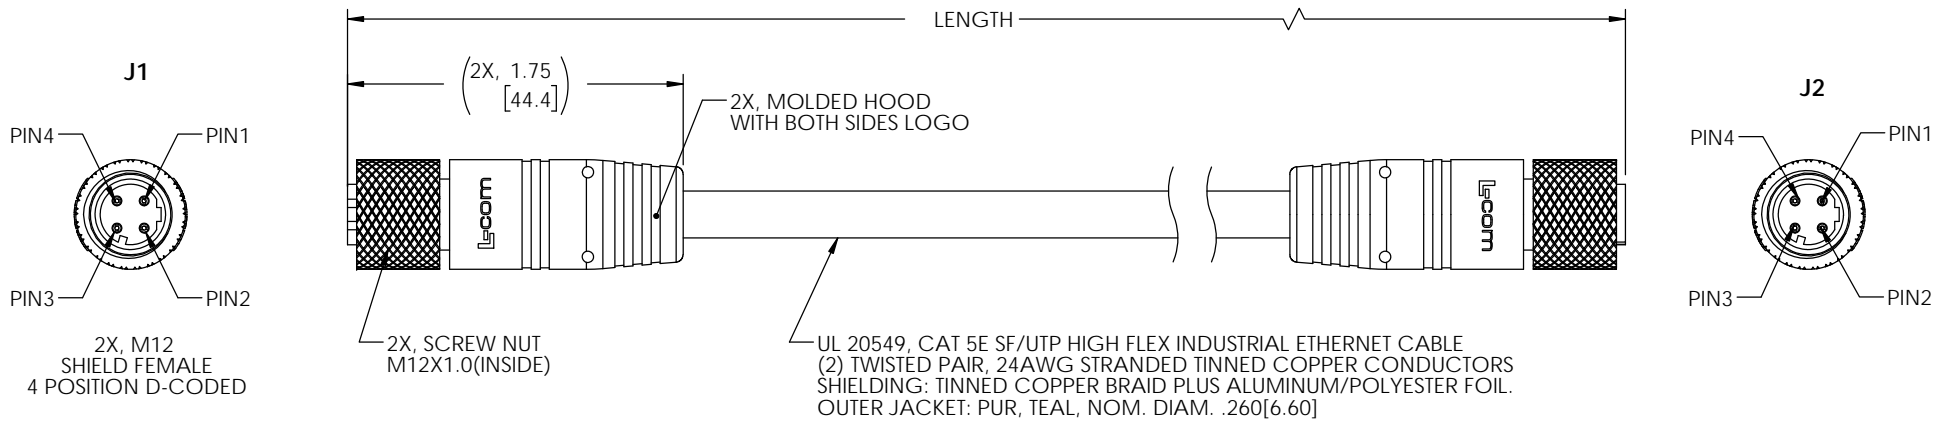

NOTES

MATERIAL:
 MOLDED HOOD: TPU, UL94 V-0, BLACK
 M12 INSULATOR: NYLON, BLACK
 M12 SHELL/SCREW NUT: BRASS, NICKEL PLATE
 M12 CONTACTS: PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 250 VAC/VDC
 MAX CURRENT: 4A


APPLICATION:
 INGRESS PROTECTION RATING IS IP68 (MATED).

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -40°C TO +75°C
 CABLE JACKET: OIL, SUNLIGHT and WELD SPLATTER RESISTANT
 CABLE FLEX LIFE: 5 MILLION CYCLE TEST (RADIUS:6X CABLE OD)

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

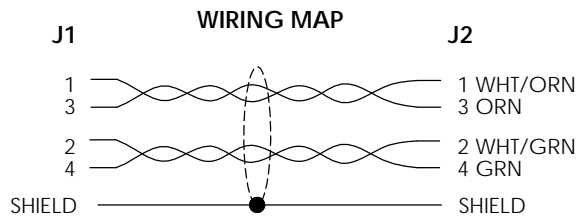

PART NUMBER	LENGTH	
	METERS	FEET
TRG503-P4T-05M	0.5	1.64
TRG503-P4T-3M	3.0	9.84
TRG503-P4T-5M	5.0	16.41

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [0.5] ANGLES ± 1° .XXX = ±.005 [0.13]		<p>an INFINIT@ brand</p> <p>Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936</p>		<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <table border="1"> <tr> <th>SCALE</th> <th>SHEET</th> </tr> <tr> <td>NONE</td> <td>1 OF 1</td> </tr> </table>		SCALE	SHEET	NONE	1 OF 1
SCALE	SHEET								
NONE	1 OF 1								
CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤ 60 [1524] = +2 [51] / -0 >60 [1524] ≤ 120 [3048] = +4 [102] / -0 >120 [3048] ≤ 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		DESCRIPTION <p align="center">C5E M12D F/F PUR 24 TEL</p>		ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.					
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV					
A	43321	BZHANG	TRG503-P4T	A					

6

5

4

3

2

1