

6

5

4

3


2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/30/2025	TDUFRENE	GUTTADAURO


F

F

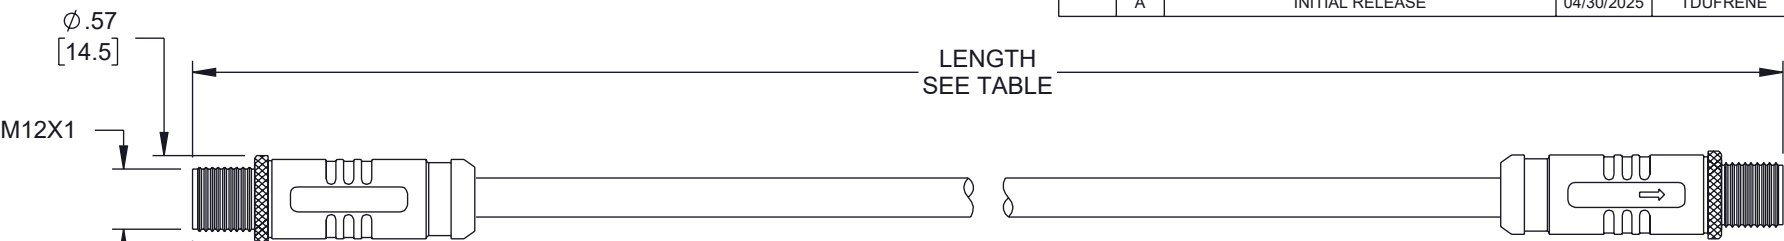


E

E

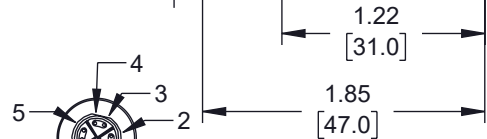

PLUG A



PLUG B

PLUG A

PLUG B

(WHITE/ORANGE) 1 1 (WHITE/ORANGE)
 (ORANGE) 2 2 (ORANGE)

(WHITE/GREEN) 3 3 (WHITE/GREEN)
 (GREEN) 4 4 (GREEN)

(WHITE/BROWN) 5 5 (WHITE/BROWN)
 (BROWN) 6 6 (BROWN)

(WHITE/BLUE) 7 7 (WHITE/BLUE)
 (BLUE) 8 8 (BLUE)

DRAIN WIRE / SCREEN ----- DRAIN WIRE / SCREEN

NOTES:

- CABLE:
 STRUCTURE: S/FTP 26AWG 4 PAIR PATCH CABLE CAT.7;
 JACKET: PUR, OD: 6.4 0.3mm; MARKING: CTi IEC 61156-6
 CATEGORY 7 S/FTP PATCH CABLE 4 PAIR 26AWG TPU
 BATCH NUMBER 00000001M (SEQUENTIAL LENGTH IN
 METERS); PLUG: M12; INNER GLUE: LWA-500 NATURAL
 COLOR; OUTER MOLDED: PUR.
- PATCH CABLE:
 IP CLASS: IP20; OPERATING TEMPERATURE RANGE:
 -40°C TO +85°C; FREQUENCY: 500MHZ; TRANSMISSION
 RATE: UP TO 10Gbps; POE: CAPABLE; PIN ASSIGNMENT:
 1:1; ASSIGNMENT ACC. STANDARD: IEC-61076-2-109;
 FLAME RESISTANCE: UL444 CMX; UV RESISTANCE: IEC
 60068-2-5 (2 CYCLE OF PROCEDURE B); OIL
 RESISTANCE: UL758 60°C; HALOGEN-FREE: IEC 60754-1.
- CONNECTOR:
 TYPE: CIRCULAR M12, X-CODE, MALE; MOUNTED; PINS:
 8; CATEGORY: CAT 6A; IP CLASS:IP68; TEMPERATURE
 RANGE -25°C TO +85°C; SHIELDED; DURABILITY: 500
 MATING CYCLES; INSULATION RESISTANCE: >100 MOhm;
 CONTACT RESISTANCE: 10 mOhm MAX; WITHSTANDING
 VOLTAGE: 500V AC/MINUTE.

PART NO.	LENGTH
TRG607-P6N-05M	19.69 [0.5m]
TRG607-P6N-1M	39.37 [1m]
TRG607-P6N-3M	118.11 [3m]
TRG607-P6N-5M	196.85 [5m]
TRG607-P6N-10M	393.7 [10m]

D

D

C

C

B

B

A

A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:

X = ±.2 [5]	FRACTIONS ± 1/32
.XX = ±.02 [0.5]	ANGLES ± 1°
.XXX = ±.005 [0.13]	

CABLE LENGTH TOLERANCES:


≤12 [305]	= +1 [25] / -0
>12 [305] ≤ 60 [1524]	= +2 [51] / -0
>60 [1524] ≤ 120 [3048]	= +4 [102] / -0
>120 [3048] ≤ 300 [7620]	= +6 [152] / -0
>300 [7620]	= +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY



an INFINIT@ brand

Website: www.L-com.com
 Phone: 1.800.341.5266 | 1.978.682.6936

 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
SCALE	SHEET
NONE	1 OF 1

DESCRIPTION
M12 CATEGORY 6A 10GIG IP68 8 POSITION X CODE DOUBLE SHIELDED S/FTP, 26AWG, OUTDOOR INDUSTRIAL CABLE, M12M M12M, CMX HFPUR, GRN

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	TDUFRENE	TRG607-P6N

REV
A

6

5

4

3

2

1