
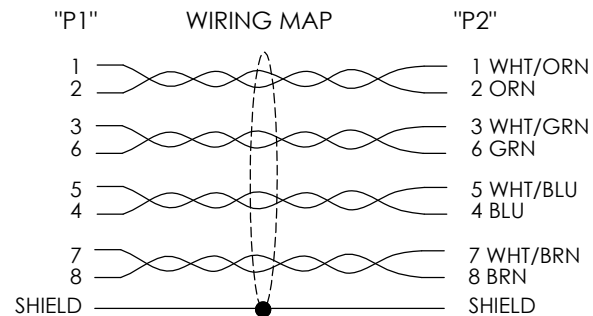


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/06/2025	BZHANG	WLI

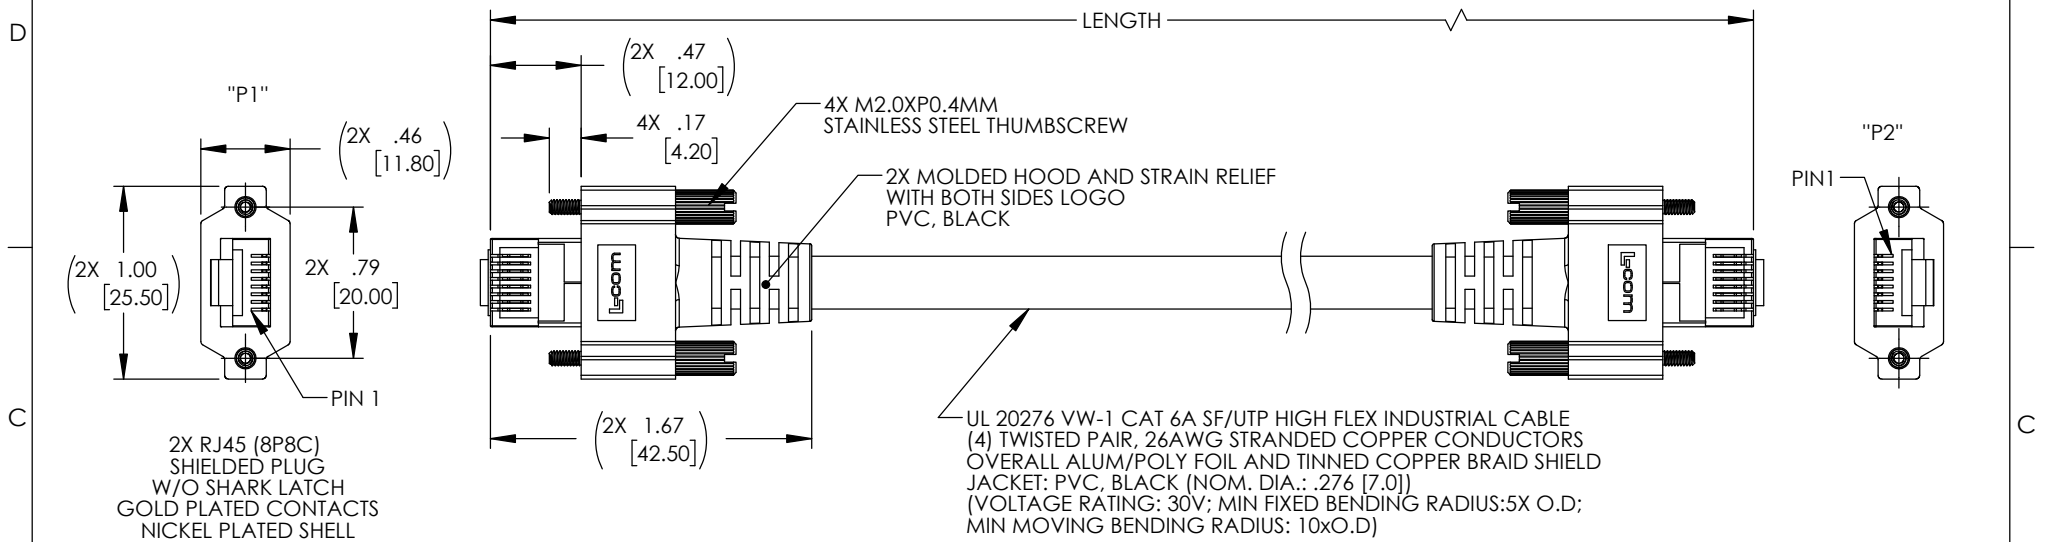


PART NUMBER	LENGTH	
	METERS	FEET
TRG618-C6B-0.5M	0.5	1.64

NOTES

1. OPERATING TEMPERATURE RANGE:
-10°C TO +80°C (FIXED); -10°C TO +60°C (MOVING)
2. CABLE TYPE-U DRAG CHAIN TESTING:
10 MILLION CYCLES (50mm Min. BENDING RADIUS)
3. ALL LENGTH CABLE ASSEMBLY ARE CHANNEL RATED
4. CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		APPROVALS		DATE		<div> an INFINITO brand</div> <div>50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936</div>	
OVERALL CABLE LENGTH TOLERANCE:		DRAWN BY BZHANG		12/06/2024			
ALL OTHER DIMENSIONAL TOLERANCES:		CHECKED BY WLI		12/06/2024			
THIRD-ANGLE PROJECTION		APPROVED BY WLI		12/06/2024		CATEGORY	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]		OVERALL CABLE LENGTH TOLERANCE:		ALL OTHER DIMENSIONAL TOLERANCES:		TELECOM/MODULAR	
.X ± .2 [5]		FRACTIONS ± 1/32		ANGLES ± 1°		PRODUCT DESCRIPTION	
.XX ± .02 [.5]		.XXX ± .005 [.13]		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		Cat6A GigE SF/UTP 26STR PVC HIFLX BLK	
THIRD-ANGLE PROJECTION		COLOR VARIATIONS MAY OCCUR		SIZE A		CAGE CODE 43321	
REF		SCALE: NONE		ITEM NO. TRG618-C6B-CN		REV. A	
CAD FILE: TRG618-C6B-CN.SLDDRW		SHEET 1 OF 1					