

Deluxe DVI-I Dual Link DVI Cable Male / Male w/ Ferrites, 5.0ft



CGDVI-I-MM-5

Configuration

Connector 1	DVI-I Dual Link Male
Connector 2	DVI-I Dual Link Male
Connector 2 Specification	DVI

Mechanical Specifications

Cable Assembly

Temperature

Temperature Operating Range, deg C	0 to +80
Temperature Storage Range, deg C	0 to +40

Size

Length, in [cm]	60 [152.4]
Cable Color	Black

Cable

Jacket Material	PVC
-----------------	-----

Connector 1

Type	DVI-I Dual Link Male
Configuration	Straight

Connector 2

Type	DVI-I Dual Link Male
Configuration	Straight

Plotted and Other Data

Notes:


- Values at +20 °C, sea level

Deluxe DVI-I Dual Link DVI Cable Male / Male w/ Ferrites, 5.0ft from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/audio-video-deluxe-dvi-i-dual-link-dvi-cable-male-male-w-ferrites-50ft>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

CGDVI-I-MM-5 CAD Drawing
Deluxe DVI-I Dual Link DVI Cable Male / Male w/ Ferrites, 5.0ft

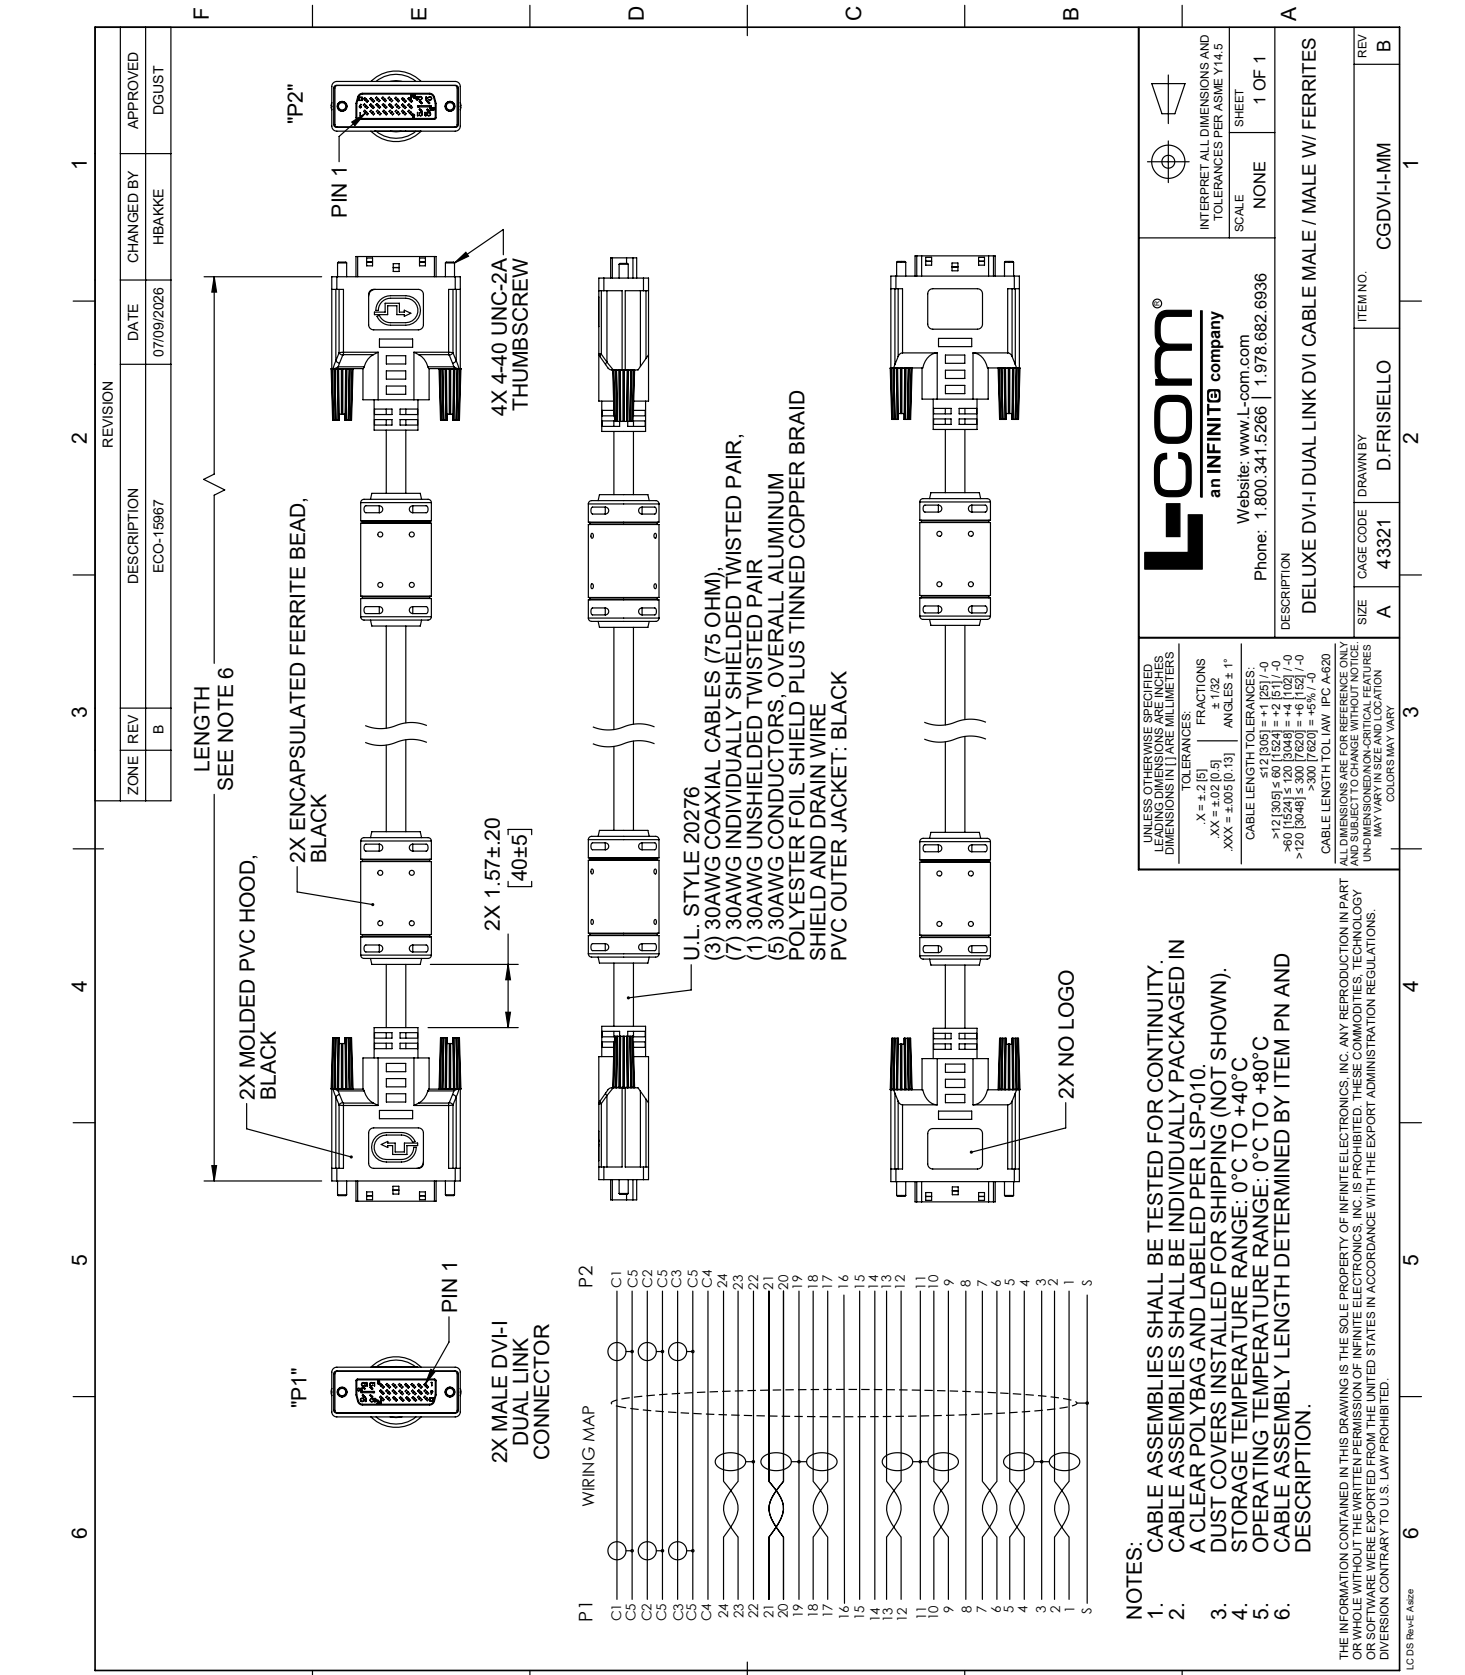

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		L-com® an INFINITO company Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:		SCALE		SHEET	
.XX = ±.2 [5]		NONE		1 OF 1	
.XXX = ±.005 [0.13]					
FRACTIONS					
± 1/32					
ANGLES ± 1°					
CABLE LENGTH TOLERANCES:					
>10 [254] = ±1 [25] / -0					
>10 [254] = ±2 [50] / -0					
>10 [254] = ±4 [102] / -0					
>120 [3048] = ±300 [7620] = ±6 [152] / -0					
>300 [7620] = ±5% / -0					
CABLE LENGTH TOL. IAW IPC A-620					
ALL DIMENSIONS ARE FOR REFERENCE ONLY. DIMENSIONS OF INDIVIDUAL PARTS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE MILLIMETERS.		ITEM NO.		REV	
		A 43321		B	
		D. FRISIELLO		CGDVI-I-MM	
		1		1	

NOTES:

- CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN A CLEAR POLYBAG AND LABELED PER LSP-010.
- DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).
- STORAGE TEMPERATURE RANGE: 0°C TO +40°C
- OPERATING TEMPERATURE RANGE: 0°C TO +80°C
- CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

LC 08 Rev-E A size