


Middle Atlantic Products

EXCEPTIONAL SUPPORT & PROTECTION™

QBP Series Quiet Blower Panel


EIA/TIA Compliant

The QBP-2 is quieter, yet puts out more CFM than other 1 space fan panels

Features

- Quiet operation, 32 db
- Fan speeds proportional to temperature of enclosure to extend fan life, reduce dust and maintenance
- Proprietary blowers provide high static pressure to maintain airflow even in crowded racks.
- For smaller rack systems and credenzas where space is at a premium and quiet operation is a must
- Compact design occupies only 1 rackspace
- 1/2 rack model also available



QBP-2A


 QBP-2A
(inverted position to draw air from the top)

 HR-QBP-1
(1/2 rack model)

Architects' and Engineers' Specifications

QBP Series

EIA compliant 19" Quiet Blower Panel shall be Middle Atlantic Products model # QBP-2_ (suffix 'A' for Black Brushed and Anodized finish). Quiet Blower panel shall be finished in a durable black powder coat (QBP-2) or black brushed and anodized (QBP-2A) and shall occupy 1 rackspace. QBP Series Blower panel shall activate at 87°F (30.5°C), reach full speed at 95°F (35°C) and switch off at 85°F (29.4°C). Quiet Blower panel shall displace 100 CFM with a maximum decibel level of 31 dB (measurements made 1 meter from source, centered horizontally and vertically). Quiet Blower panel shall be manufactured by an ISO 9001 and ISO 14001 registered company. Quiet Blower panel shall be warranted to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years. Quiet Blower panel shall include a UL Listed 12V DC power supply and temperature probe with a 9' cord.






HR-QBP-1

10.4" Half Rack Quiet Blower Panel shall be Middle Atlantic Products model # HR-QBP-1. Half Rack Quiet Blower panel shall be finished in a durable black powder coat and shall occupy 1 rackspace. Half Rack Quiet Blower panel shall activate at 87°F (30.5°C), reach full speed at 95°F (35°C) and switch off at 85°F (29.4°C). Half Rack Quiet Blower panel shall displace 50 CFM with a maximum decibel level of 28 dB (measurements made 1 meter from source, centered horizontally and vertically). Half Rack Quiet Blower panel shall be manufactured by an ISO 9001 and ISO 14001 registered company. Half Rack Quiet Blower panel shall be warranted to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years. Half Rack Quiet Blower panel shall include a UL Listed 12V DC power supply and temperature probe with a 9' cord.

CUSTOMIZABLE SPECIFICATION CLIPS AVAILABLE AT MIDDLEATLANTIC.COM

QBP-2 basic dimensions

All dimensions in inches unless otherwise noted [All dimensions in brackets are in millimeters]

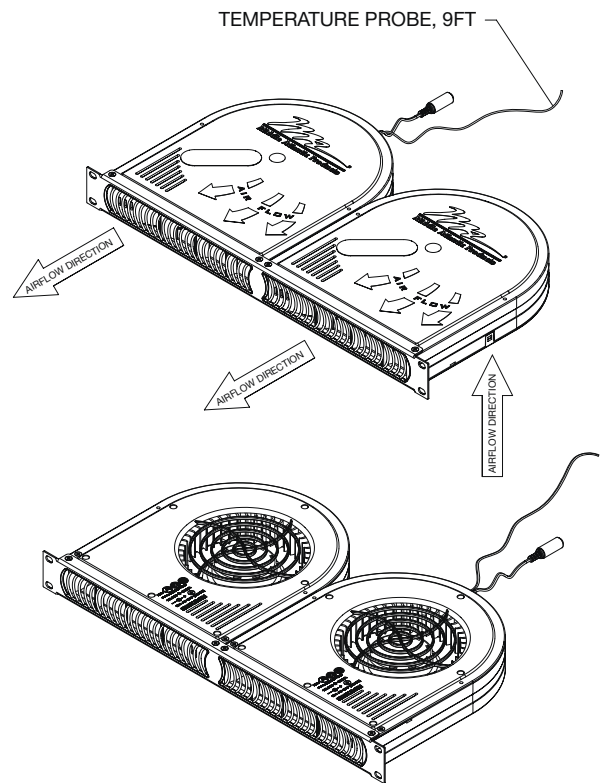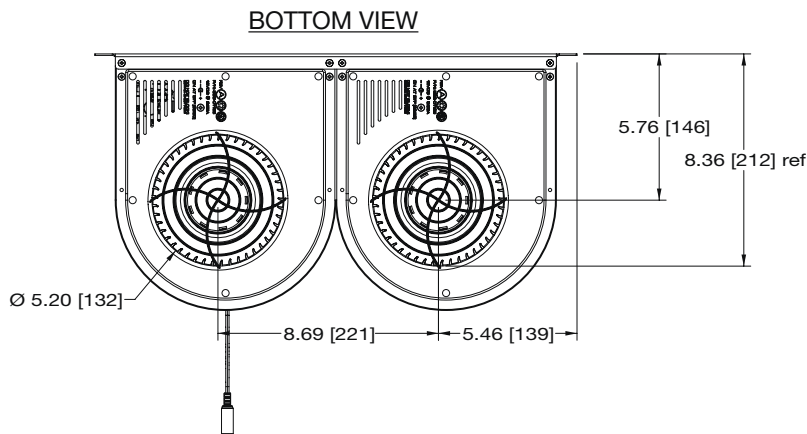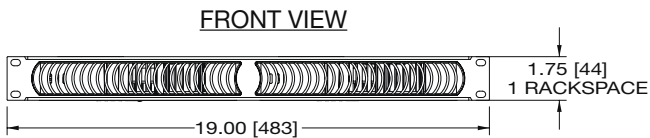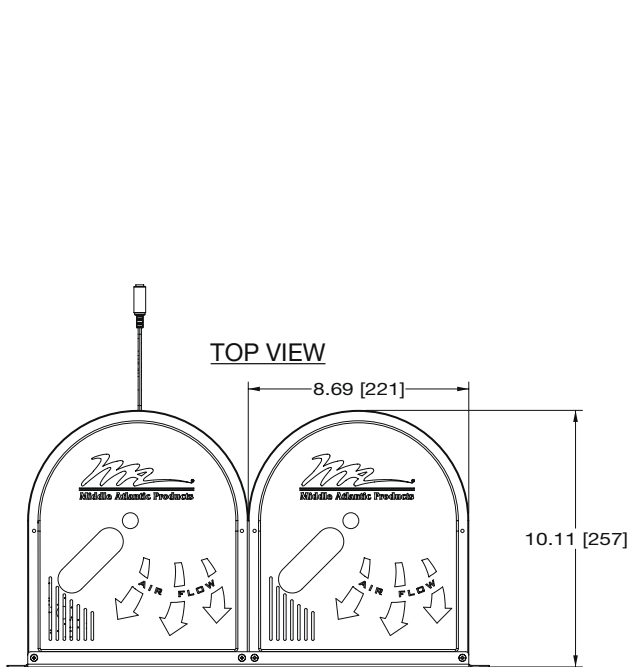

NOTE(S):


1. FAN SPECIFICATIONS:

AIRFLOW: 100 CFM [2.8 M³/MIN]
CURRENT DRAW: 840mA @ 12 VDC
SOUND LEVEL: 32 dBA @ 1 M
STATIC PRESSURE: 0.31 IN H₂O [77.22 Pa]




QBP-1 basic dimensions


All dimensions in inches unless otherwise noted [All dimensions in brackets are in millimeters]

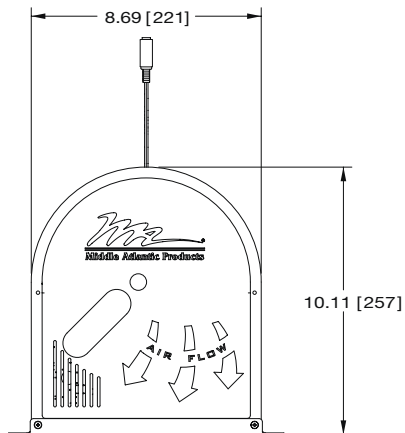



TOP VIEW




FRONT VIEW

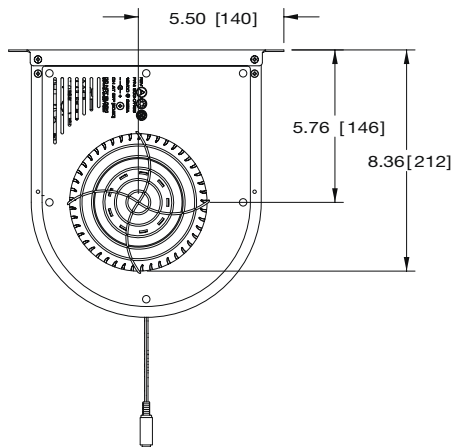

BOTTOM VIEW

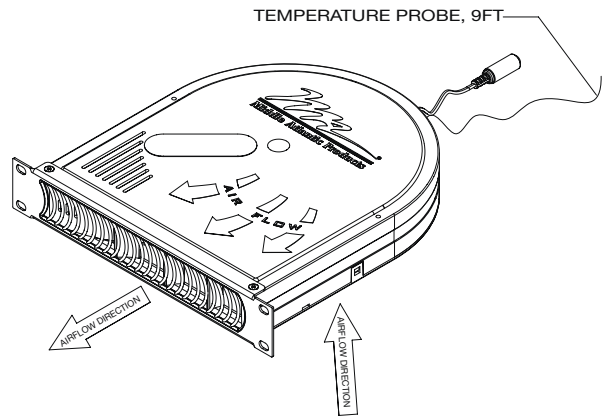

SIDE VIEW

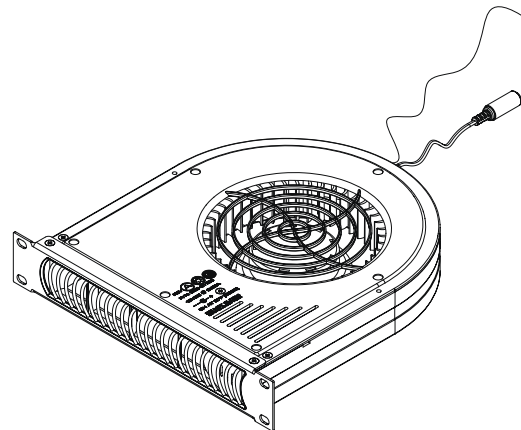

NOTE(S):

1. FAN SPECIFICATIONS:
 AIRFLOW: 50 CFM [1.4 M3/MIN]
 CURRENT DRAW: 420mA @ 12 VDC
 SOUND LEVEL: 28 dBA @ 1 M
 STATIC PRESSURE: 0.31 IN H2O [77.22 Pa]
2. DIMENSION FORMAT SHOWN: IN [MM]

