

14x12x07 Fiberglass Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Insulated Enclosure, PoE MNT PLT, Pwr Supply Incl, Thermostat Heat Gray

NB141207-4H0N



Features

- Molded Fiberglass Reinforced Polyester (FRP) industrial enclosure with foam insulation to minimize heat loss in sub-zero installations
- Stainless steel quick release latches with padlock hasps
- NEMA Type 4 / IP66 rated*
- Fully gasketed raised lid & integral mounting flange
- Features aluminum mounting plate & thermostat-controlled heating system
- Power provided to the heating system from remote mounted DC injector and power supply (included)

Applications

- Remote wireless LAN WiFi equipment installations
- Indoor/outdoor installations
- Corrosive environments
- Hotspot
- Protection of equipment from theft or damage

Description

The box is a rugged weatherproof enclosure that is ideal for both indoor and outdoor applications. Constructed from molded fiberglass reinforced polyester, it is well suited for high temperature or corrosive environments. The integrated mounting flange allows it to be mounted directly to any flat wall surface provided proper screws are used into secure studs.

The enclosure can be also be mounted to a wide diameter range of poles with one of our optional pole mounting hardware kits.

The raised lid features a stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. Includes fully gasketed lid & integral mounting flange.

The enclosure material is UV stabilized and comes in machine tool gray.

Mounting Plate

The modified aluminum mounting plate included with the NB141207-4H0N comes pre-drilled and cut holes to use as needed to mount WLAN equipment or whatever equipment you may require. The drawing displays the hidden lines indicating the location of components mounted on the back of the plate and should be avoided when drilling into the plate. The enclosure also features holes for two N-Bulkhead lightning protectors or connectors, a grounding lug, and a cable conduit connector.

The HGX-PMT series of pole mounting kits allow the populated enclosure to be securely mounted to a variety of different size poles.

Compatible versions include HGX-PMT13, HGX-PMT16, HGX-PMT28, HGX-PMT29, HGX-PMT30 & HGX-PMT33

*Note: Enclosure ports (cable conduit connector and N-type holes for lightning protectors or connectors) must be properly sealed to maintain NEMA Type 4 / IP66 rating.

Sub-zero Applications

The NB141207-4H0N enclosure is designed for use in sub-zero environments down to -30°F (-34°C). It features a 48 VDC 50W thermostat controlled heating system that will, along with the heat generated by an internal device such as an access point, maintain a nominal internal ambient temperature of +40°F (4°C). A single CAT5 cable provides power to the heating system from a remote mounted DC Injector and Power Supply which are included with the enclosure. An additional CAT5 cable would then be used to supply data and power to installed PoE equipment.

This enclosure includes:

- (1) BT-CAT5-NB2 - DC Injector: used to supply heating system power to a single NB141207-4H0N Sub-Zero Heated Enclosure.
- (1) PS4870-25R - 70W Power Supply for BT-CAT5-NB2 DC Injector: 48VDC@70W, 110/220 VAC, 2.5mm DC Plug

Additional Applications

For applications requiring multiple enclosure installations we recommend purchasing the BT-CAT5-NB12. This rack mount DC injector can supply power for up to 12 NB141207-4H0N heated enclosures.

Application Diagram

14x12x07 Fiberglass Polyester FRP Weatherproof
Outdoor IP66 NEMA 4 Insulated Enclosure, PoE
MNT PLT, Pwr Supply Incl, Thermostat Heat Gray

NB141207-4H0N



Application Note:


The Transtector NB141207-4H0N sub-zero NEMA enclosure uses a proprietary wiring pin out. The RJ-45 connectors on the NB141207-4H0N sub-zero NEMA enclosure or the Transtector sub-zero DC power injector, should never be connected to any other manufacturers equipment. Transtector Systems Inc. is not liable for any damage done to incompatible equipment due to misuse of the Transtector sub-zero NEMA equipment

Mechanical Specifications

Size

Outer Height	15.5 in	[393.7 mm]
Outer Width	13.32 in	[338.33 mm]
Outer Depth	8.26 in	[209.8 mm]
Inner Height	14 in	[355.6 mm]
Inner Width	12 in	[304.8 mm]
Inner Depth	7.95 in	[201.93 mm]
Weight	10.81 lbs	[4.9 kg]
Enclosure Material	Fiberglass Reinforced Polyester (FRP)	

Mounting Plate Diagram - NB141207-4H0N

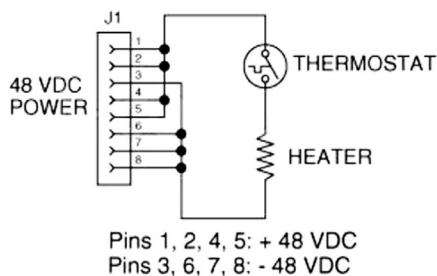

Environmental Specifications

NEMA Rating	4
Ingress Protection (IP) Rating	IP66
Temperature Continuous	-50 to +150°C

Compliance Certifications

UL Listed	No
-----------	----

14x12x07 Fiberglass Polyester FRP Weatherproof
Outdoor IP66 NEMA 4 Insulated Enclosure, PoE
MNT PLT, Pwr Supply Incl, Thermostat Heat Gray


NB141207-4H0N



DC Injector Specifications

Enclosure Material	Cast Aluminum Alloy
Weight	.28 lbs (.13 kg)
Dimensions	3.6 x 1.4 x 1.2 in. (91.4 x 35.5 x 30.4 mm)

BT-CAT5-NB2

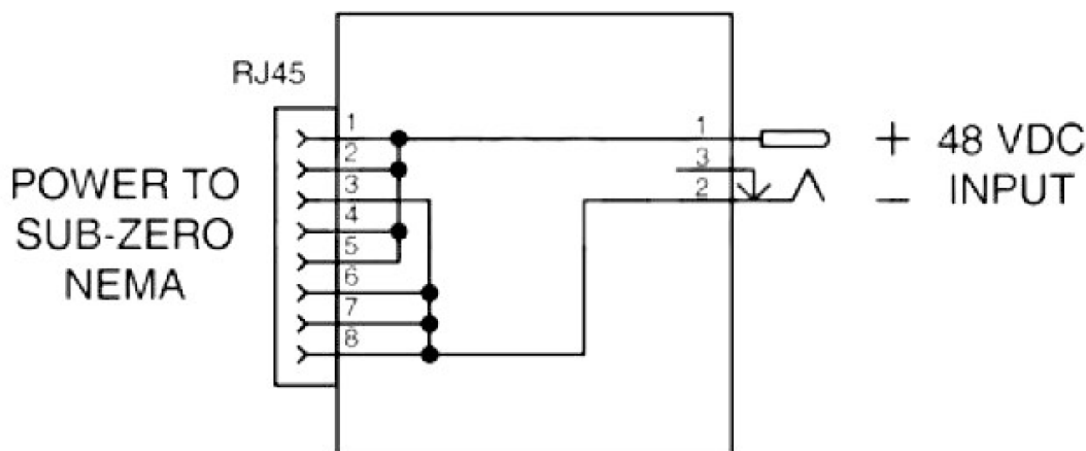

14x12x07 Fiberglass Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Insulated Enclosure, PoE MNT PLT, Pwr Supply Incl, Thermostat Heat Gray from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/nema-enclosures-14x12x7-inch-48vdc-poe-powered-weatherproof-insulated-enclosure-with-heating-system-p.aspx>


The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

14x12x07 Fiberglass Polyester FRP Weatherproof
Outdoor IP66 NEMA 4 Insulated Enclosure, PoE
MNT PLT, Pwr Supply Incl, Thermostat Heat Gray

NB141207-4H0N



Application Diagram

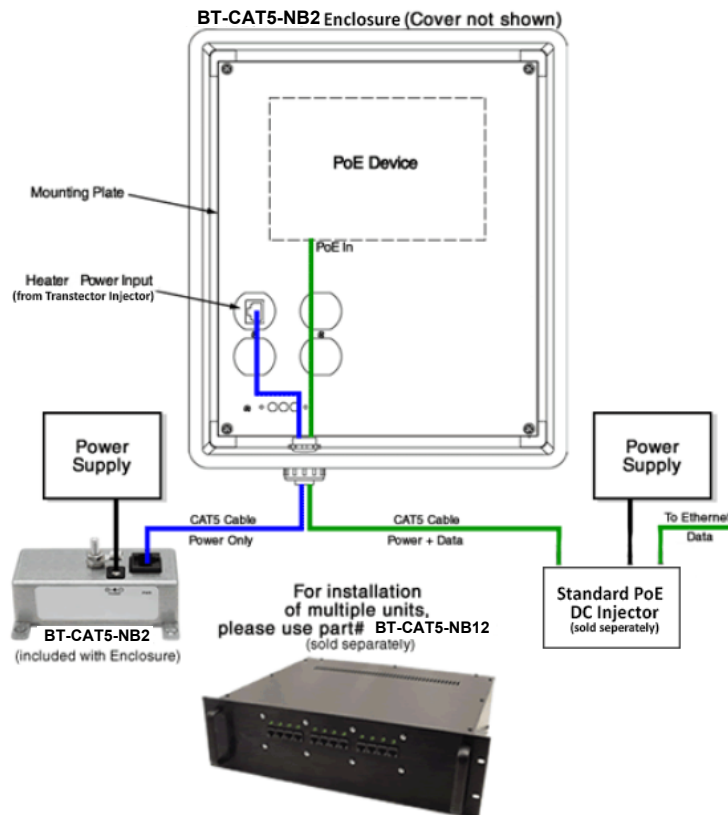

14x12x07 Fiberglass Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Insulated Enclosure, PoE MNT PLT, Pwr Supply Incl, Thermostat Heat Gray from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/nema-enclosures-14x12x7-inch-48vdc-poe-powered-weatherproof-insulated-enclosure-with-heating-system-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

NB141207-4H0N CAD Drawing
14x12x07 Fiberglass Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Insulated Enclosure, PoE MNT PLT, Pwr Supply Incl, Thermostat Heat Gray

