


RF PCB Connector, SMA, Female, Up to 18 GHz, Edge Mount, Straight, 0.069 inch PCB Thickness



RFPCB-SMA-FS18G-39

Configuration

- SMA Female Connector
- 50 Ohms
- Straight Body Geometry
- Edge Mount Interface Type
- Solder Attachment

Features

- Max. Operating Frequency 18 GHz
- Gold Plated Beryllium Copper Alloy Contact

Applications

- General Purpose Test
- PCB Applications

Description

RFPCB-SMA-FS18G-39 SMA female PCB connector available from L-com has a 50 Ohm impedance. This RF connector has an edge mount connector mount interface and is designed for a wide variety of Printed-Circuit Board (PCB) applications in RF and microwave systems. This SMA female connector uses solder as an attachment method. Our SMA female PCB connector provides a minimum frequency of DC and a maximum frequency of 18 GHz. The SMA connector is available in a 0.56-inch length and 0.31-inch width. The L-com SMA female PCB connector has a PTFE dielectric type. This SMA PCB connector has a brass body with gold plating. Our RFPCB-SMA-FS18G-39 SMA connector uses beryllium copper alloy contacts and gold plating material. This SMA female PCB radio frequency connector is RoHS and REACH compliant.

This L-com SMA female connector will ship the same day as purchased. Our SMA female connector is part of over 40,000 RF, microwave, and millimeter wave components in stock for worldwide shipment. We also build SMA custom connector cable assemblies that will ship the same day as well.

The SMA female connector with 50 Ohm impedance has a weight of 0.00456 lbs. This RF connector has a high-quality construction. The female coaxial connector is capable of operating at temperatures ranging from -55 deg C to 125 deg C. We currently have a variety of antenna, audio/video, Ethernet, fiber optic, and USB connectors in our portfolio that are ready to ship today. For further information on similar products, our expert technical support and knowledgeable sales team can help you get the high-quality RF that meets your requirements.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz


Mechanical Specifications

Size

Length	0.56 in [14.22 mm]
Width	0.31 in [7.87 mm]
Height	0.38 in [9.65 mm]
Weight	0.00 lbs [2.04 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [RF PCB Connector, SMA, Female, Up to 18 GHz, Edge Mount, Straight, 0.069 inch PCB Thickness RFPCB-SMA-FS18G-39](#)

RF PCB Connector, SMA, Female, Up to 18 GHz, Edge Mount, Straight, 0.069 inch PCB Thickness



RFPCB-SMA-FS18G-39

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold
Insulation	PTFE	
Body	Brass	Gold

Environmental Specifications

Temperature

Operating Range

-55deg C to +125deg C

Compliance Certifications (see [product page](#) for current document)


Plotted and Other Data

RF PCB Connector, SMA, Female, Up to 18 GHz, Edge Mount, Straight, 0.069 inch PCB Thickness from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components. Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RF PCB Connector, SMA, Female, Up to 18 GHz, Edge Mount, Straight, 0.069 inch PCB Thickness RFPCB-SMA-FS18G-39

URL: <https://www.l-com.com/rf-pcb-connector-sma-female-up-18-ghz-edge-mount-straight-rfpcb-sma-fs18g-39-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document. The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

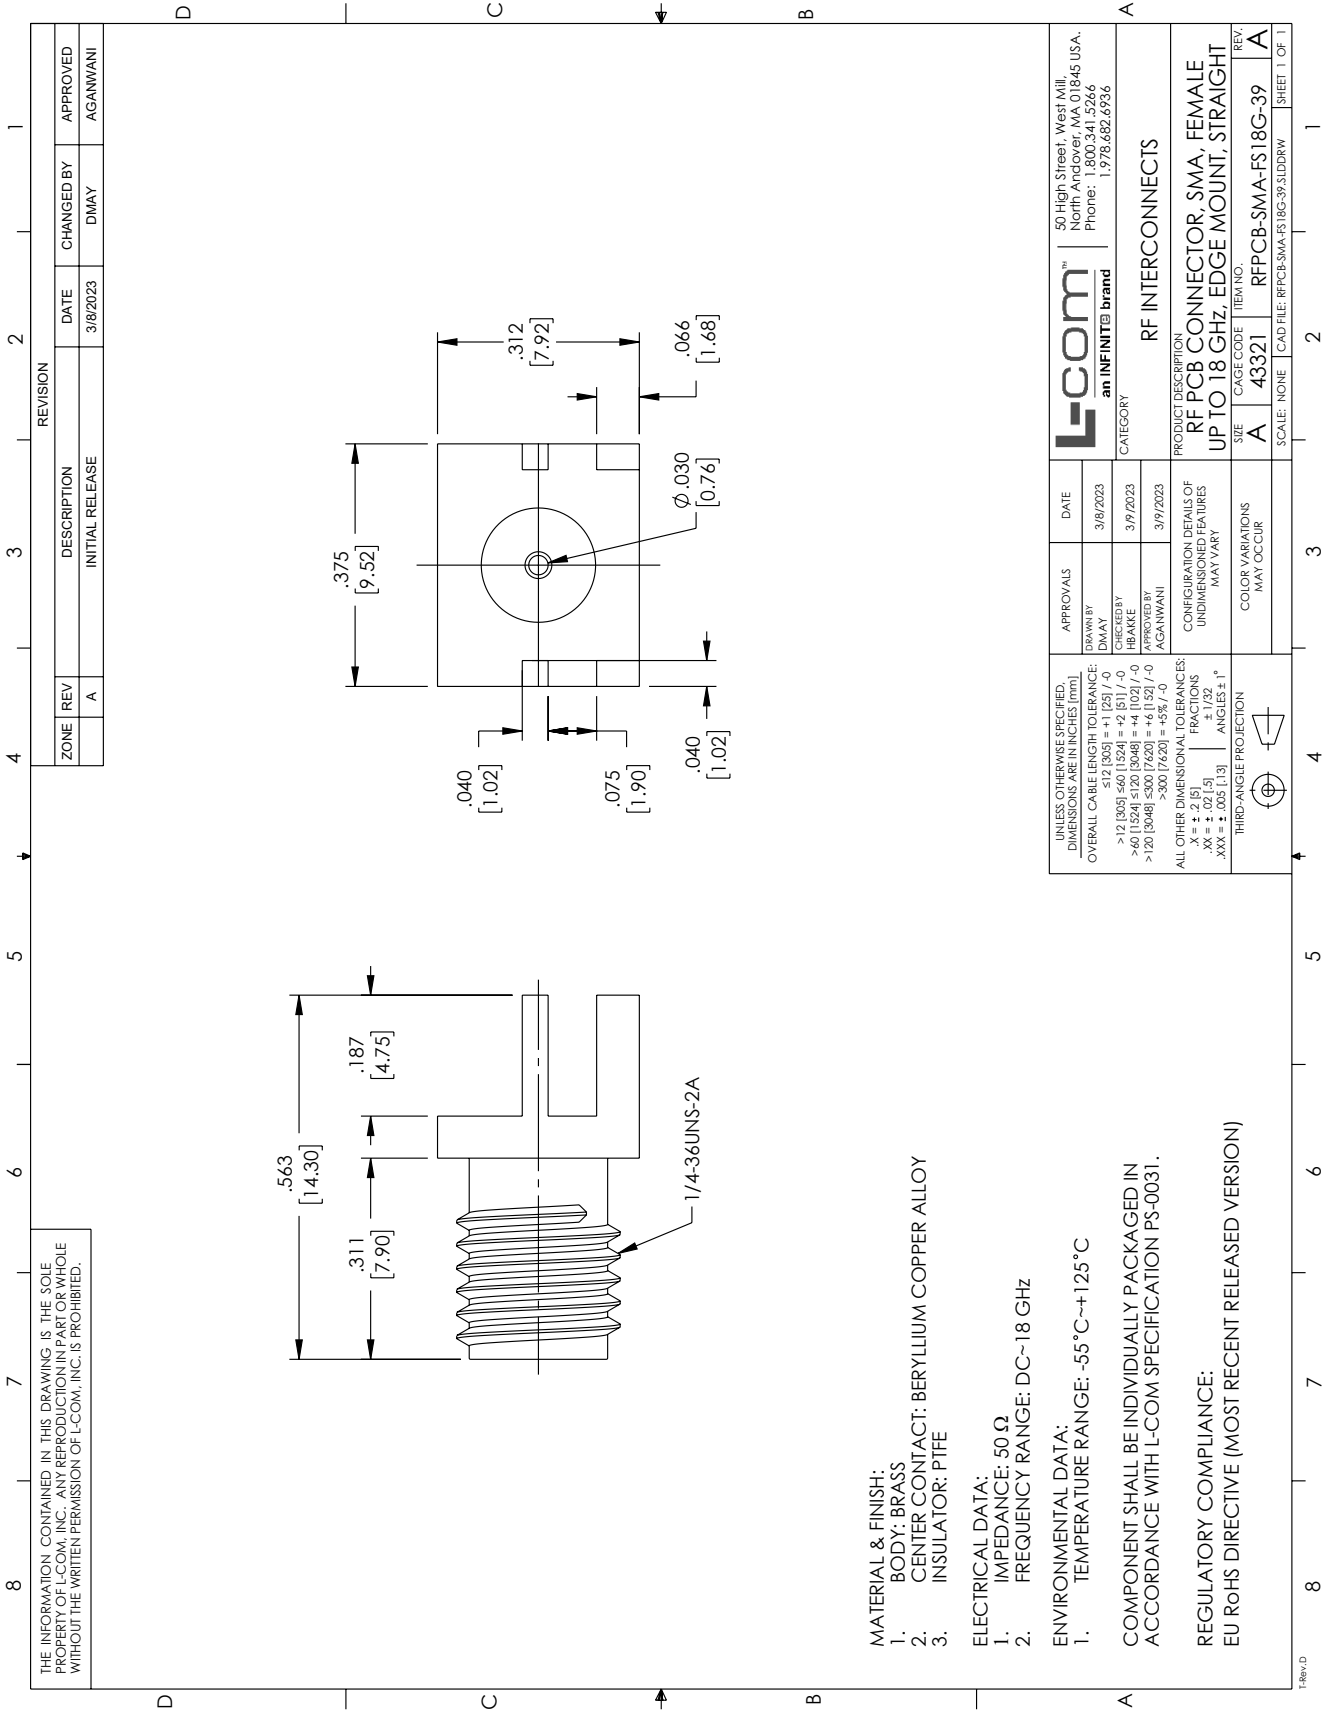

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

- MATERIAL & FINISH:**
- BODY: BRASS
 - CENTER CONTACT: BERYLLIUM COPPER ALLOY
 - INSULATOR: PTFE
- ELECTRICAL DATA:**
- IMPEDANCE: 50 Ω
 - FREQUENCY RANGE: DC~18 GHz
- ENVIRONMENTAL DATA:**
- TEMPERATURE RANGE: -55 °C~+125 °C
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
- REGULATORY COMPLIANCE:**
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

<p>L-com an INFINITB brand</p>		<p>50 High Street, West Mill, North Andover, MA 01845 USA, Phone: 1.800.341.5266 1.978.682.6936</p>	
<p>APPROVALS</p>	<p>DATE</p>	<p>RF INTERCONNECTS</p>	
<p>DRAWN BY DMAY</p>	<p>3/18/2023</p>	<p>PRODUCT DESCRIPTION RF PCB CONNECTOR, SMA, FEMALE UP TO 18 GHz, EDGE MOUNT, STRAIGHT</p>	
<p>CHECKED BY HBAKKE</p>	<p>3/17/2023</p>	<p>SIZE</p>	<p>ITEM NO.</p>
<p>APPROVED BY AGANWANI</p>	<p>3/17/2023</p>	<p>A</p>	<p>43321</p>
<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (mm)</p>		<p>CATEGORY</p>	
<p>OVERALL CABLE LENGTH TOLERANCE:</p>	<p>s12 (305) = +1 (25) / -0</p>	<p>RF PCB-SMA-FS-18G-39</p>	
<p>>12 (305) s60 (1524) = +2 (51) / -0</p>	<p>>60 (1524) s120 (3048) = +4 (102) / -0</p>	<p>SCALE: NONE</p>	
<p>>120 (3048) s300 (7620) = +6 (152) / -0</p>	<p>>300 (7620) = +5% / -0</p>	<p>CAD FILE: RFPCB-SMA-FS-18G-39-3D.DRW</p>	
<p>ALL OTHER DIMENSIONAL TOLERANCES: FRACTIONS XX = ± .005 (13) XXX = ± .005 (13)</p>		<p>REV</p>	
<p>ANGLES ± °</p>		<p>A</p>	
<p>THIRD-ANGLE PROJECTION</p>		<p>RFPCB-SMA-FS-18G-39</p>	
<p>COLOR VARIATIONS MAY OCCUR</p>		<p>SHEET 1 OF 1</p>	