
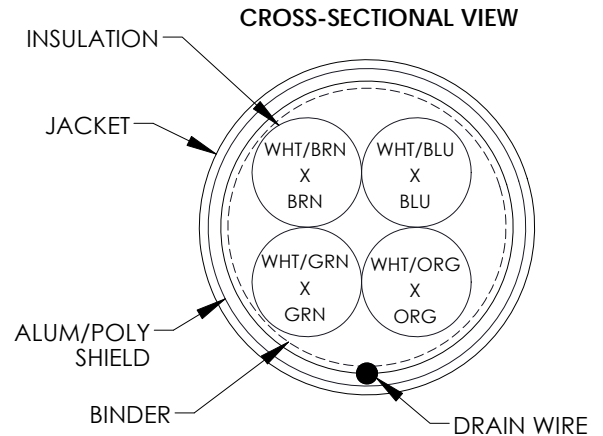


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
D	ECN 10346: ADDED -100, -500, NEW FORMAT	01/29/2020	GUTTADAURO

TFC2004-XXX CONSISTS OF A CONTINUOUS LENGTH OF BULK CABLE

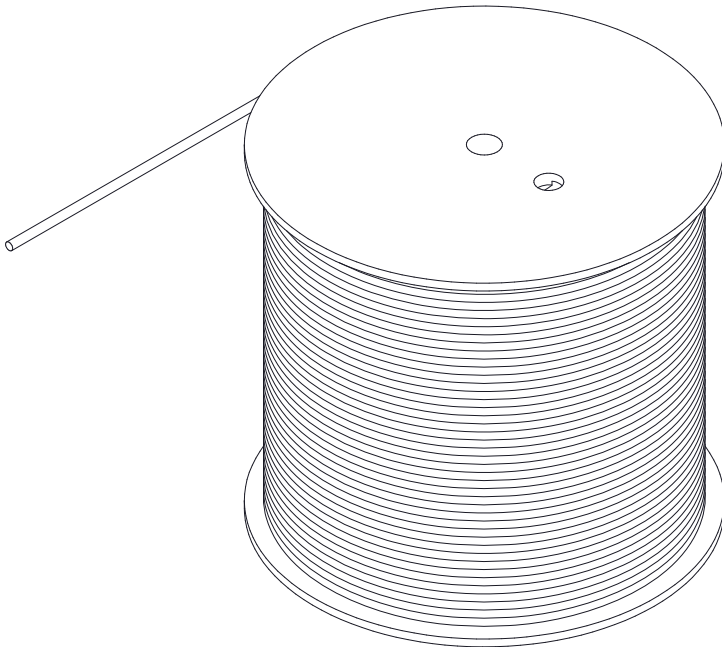

COLOR CODE
 BLUE x WHITE/BLUE
 ORANGE x WHITE/ORANGE
 GREEN x WHITE/GREEN
 BROWN x WHITE/BROWN

NOTES:

1. CONSTRUCTION:

CONDUCTOR: 26 AWG STRANDED TINNED COPPER
 INSULATION MATERIAL: POLYOLEFIN
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS
 BINDER: CLEAR POLYESTER BINDER
 OUTER SHIELD: AN ALUMINUM POLYESTER FOIL SHIELD, 100% COVERAGE (FOIL IN)
 DRAIN: 26AWG TINNED COPPER DRAIN WIRE
 JACKET: POLYVINYLCHLORIDE, LIGHT GRAY (BEIGE)

O.D: .039"

CABLE DIA: 0.222" NOM.

2. PHYSICAL PROPERTIES:

TEMPERATURE RATING: -20° C TO +75° C

3. AGENCY APPROVALS:

NEC (UL) TYPE CMR, CEC C(UL) TYPE CMR, ETL VERIFIED TO TIA-568-C.2 CAT 5e, RoHS COMPLIANT



4. JACKET PRINT:

QUABBIN DATAMAX 5e SCREENED 100 OHM PATCH CORD ISO 11801 P/N 2910 -- TYPE CMR C(UL)US 26 AWG 75C -- ETL VERIFIED TO TIA-568-C.2 CAT 5e -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

5. ELECTRICAL CHARACTERISTICS: (FOR 100M OF CABLE)

CAPACITANC, MUTUAL NOM. 13.5 PF/FT AT 1 MHz
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 42.6 OHM/1000 FT
 IMPEDANCE 100 +/- 15 OHM 1-100 MHz

MODEL NUMBER	LENGTH	COLOR	PACKAGING
TFC2004	1000.0 FT	LIGHT GRAY	SPOOL
TFC2004-100	100.0 FT	LIGHT GRAY	POLY BAG
TFC2004-500	500.0 FT	LIGHT GRAY	SPOOL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] - 60 [1524] = +2 [51] / -0 >60 [1524] - 120 [3048] = +4 [102] / -0 >120 [3048] - 300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = .2 [5.08] .XX = .02 [51] .XXX = .005 [13]	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DFRISIELLO	01/21/2020	
PROJECTION 	CHECKED BY GUTTADAURO	01/29/2020	CATEGORY TELECOM/MODULAR
	APPROVED BY GUTTADAURO	01/29/2020	PRODUCT DESCRIPTION C5e F/UTP 26STR PVC CMR LT GRY
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
		DWG. NO. TFC2004	REV. D
		SCALE: NONE	CAD FILE: TFC2004.SLDDRW
		SHEET 1 OF 1	