

1.8 dBi, VHF Rubber Duck Antenna, 136-149 MHz, BNC Connector, Vertical Polarization



LCANRBD1006

Features

- 136 MHz to 149 MHz, 1.8 dBi Gain
- BNC connector
- Heliflex whip antenna
- Plug and play
- 10W power handling
- VSWR < 3:1
- Vertical polarization

Applications

- PtP or PtMP applications
- Trunking for two-way radio comms
- VHF applications
- Public Safety / Emergency services
- Marine / Rail road communications
- P-25 applications exclusively supported
- Land mobile radio (LMR)
- Fixed and mobile services

Description

The LCANRBD1006 rubber duck antenna from L-com is part of our extensive line of directional antennas that we offer with global same-day shipping from our facilities certified to ISO 9001:2015. L-com's high-quality single-band rubber duck antenna has a 1.8 dBi nominal gain and can be procured with no order limit. This rubber duck single-band 1.8 dBi antenna has a frequency range of 136 MHz to 149 MHz.

We lead the industry in supplying products like this 136 MHz to 149 MHz single-band antenna, along with other RF, microwave, and millimeter wave components. This rubber duck antenna from L-com uses a BNC connector and has a maximum input power of 10 watts. Use our single-band rubber duck antenna with vertical polarization for fixed and mobile services, public safety or emergency services, trunking for two-way radio communications, marine or rail road communications, land mobile radio (LMR), PtP or PtMP, and P-25 applications.

L-com's rubber duck antenna with 1.8 dBi gain has a BNC-type connector. This BNC-series connectorized omnidirectional antenna is 0.5 inches tall, 0.5 inches wide, and 6.69 inches long. The LCANRBD1006 VHF antenna has 360-degrees of horizontal and 90-degrees of vertical HPBW. Our high-quality antenna has a maximum input VSWR (voltage standing wave ratio) of 3:1.

L-com's 50 Ohms impedance antenna can operate at temperatures ranging from -40 °C to 60 °C. This single-band rubber duck antenna is offered with expert technical support, PDF datasheets, and CAD drawings with dimensions and specifications. Order your 1.8 dBi VHF rubber duck antennas now and enjoy our international or domestic same-day shipping.

Configuration

Design	Rubber Duck
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	BNC

Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	136		149	MHz
Input VSWR			3:1	
Impedance		50		Ohms
Gain		1.8		dBi
Horizontal (Azimuth) HPBW		360		Omnidirectional Degrees
Vertical (Elevation) HPBW		90		Degrees
Input Power			10	Watts

1.8 dBi, VHF Rubber Duck Antenna, 136-149 MHz,
BNC Connector, Vertical Polarization



LCANRBD1006

VSWR plot:

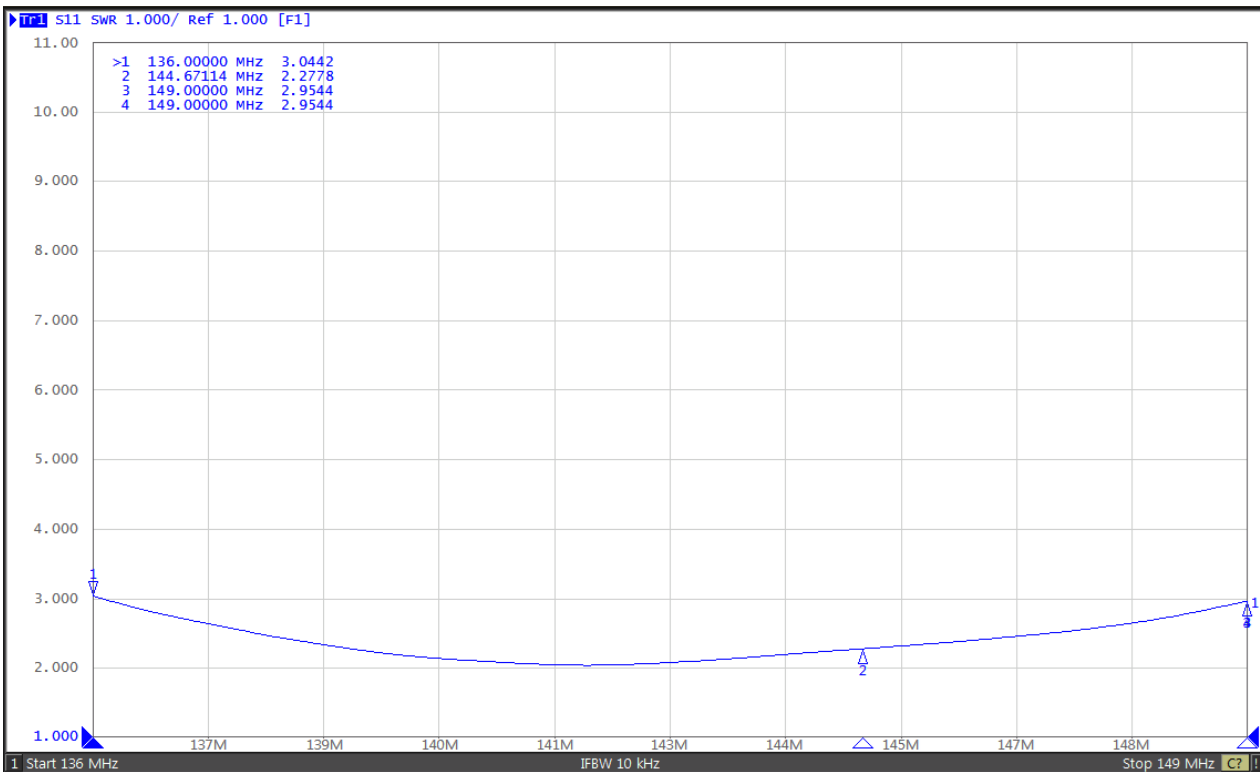

Mechanical Specifications

Radome Material	ABS
Size	
Length	6.69 in [169.93 mm]
Width	0.5 in [12.7 mm]
Height	0.5 in [12.7 mm]
Weight	0.077 lbs [34.93 g]

Environmental Specifications

Temperature	
Operating Range	-40 to +60 deg C

1.8 dBi, VHF Rubber Duck Antenna, 136-149 MHz,
BNC Connector, Vertical Polarization

LCANRBD1006



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Radiation Pattern

Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.


1.8 dBi, VHF Rubber Duck Antenna, 136-149 MHz, BNC Connector, Vertical Polarization from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/1.8-dbi-vhf-rubber-duck-antenna-136-149-mhz-bnc-connector-vertical-polarization-lcanrbd1006-p.aspx>


The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

LCANRBD1006 CAD Drawing

1.8 dBi, VHF Rubber Duck Antenna, 136-149 MHz, BNC Connector, Vertical Polarization

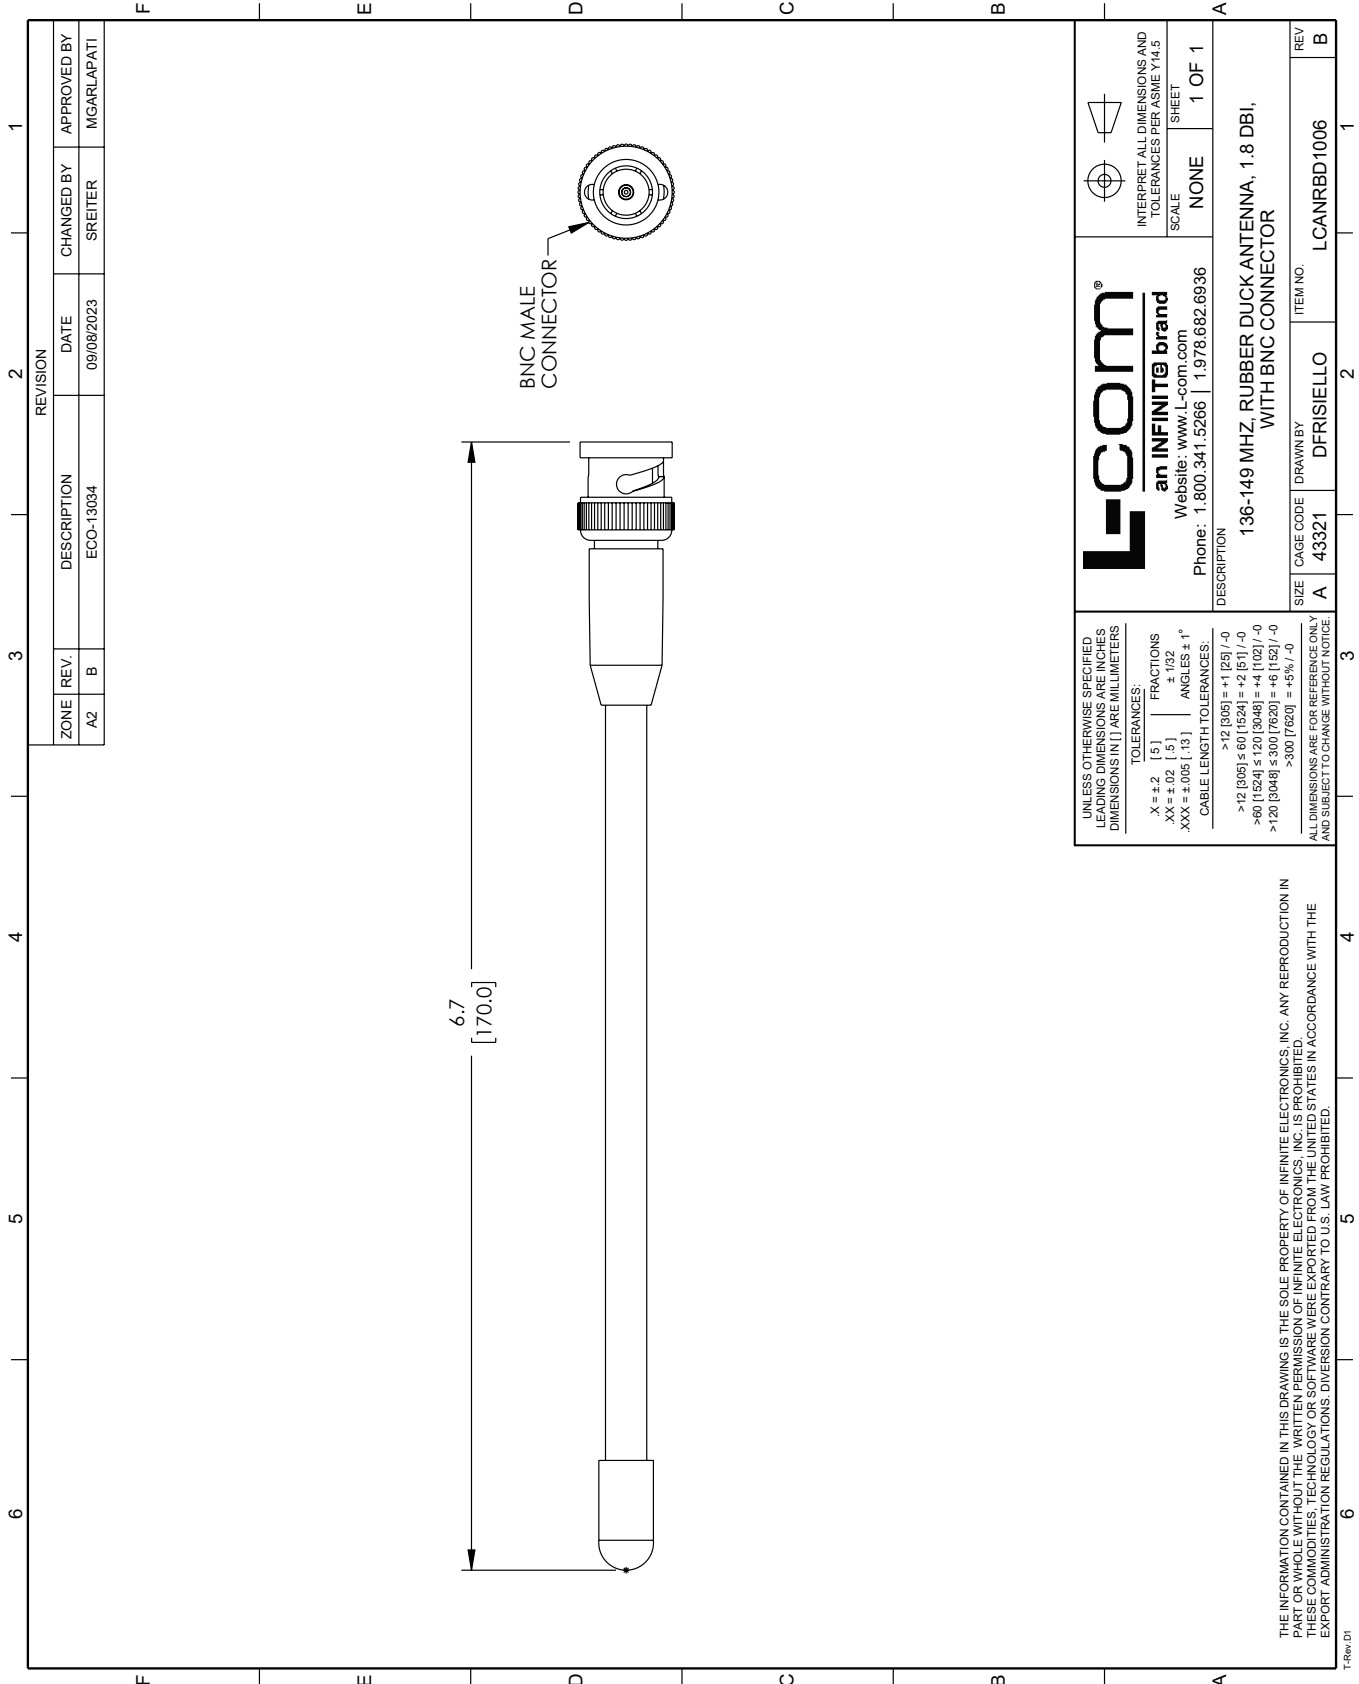

ZONE		REV.		DESCRIPTION		DATE		CHANGED BY		APPROVED BY	
A2	B			ECO-13034		09/08/2023		SREITER		MGARLAPATI	

 an INFINITE brand Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936		INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE: NONE SHEET: 1 OF 1	
DESCRIPTION: 136-149 MHz, RUBBER DUCK ANTENNA, 1.8 DBI, WITH BNC CONNECTOR			
SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	43321	DFRISIELLO	LCANRBD1006

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [.5] FRACTIONS ± 1/32
 .XX = ±.02 [.5] ANGLES ± 1°
 .XXX = ±.005 [.13]

CABLE LENGTH TOLERANCES:

>12 [3048] = +1 [25] / -0
 >60 [1524] ≤ 120 [3048] = +4 [103] / -0
 >120 [3048] ≤ 300 [7620] = +6 [153] / -0
 >300 [7620] = +9% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev. 01