

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz, BNC-Male Connector, Vertical Polarization



LCANRBD1008

Features

- 139 MHz to 149 MHz, 1.8 dBi Gain
- BNC connector
- Heliflex whip antenna
- Plug and play
- 20W power handling
- VSWR < 3:1
- Vertical polarization

Applications

- PtP or PtMP applications
- Trunking for two-way radio comms
- VHF applications
- Public Safety / Emergency services
- Marine / Rail road communications
- P-25 applications exclusively supported
- Land mobile radio (LMR®)
- Fixed and mobile services

Description

The LCANRBD1008 rubber duck antenna from L-Com is part of our extensive line of directional antennas that we offer with global same-day shipping from our facilities certified to ISO 9001:2015. L-Com's high-quality single-band rubber duck antenna has a 1.8 dBi nominal gain and can be procured with no order limit. This rubber duck single-band 1.8 dBi antenna has a frequency range of 139 MHz to 149 MHz.

We lead the industry in supplying products like this 139 MHz to 149 MHz single-band antenna, along with other RF, microwave, and millimeter wave components. This rubber duck antenna from L-Com uses a BNC-Male connector and has a maximum input power of 20 watts. Use our single-band rubber duck antenna with vertical polarization for fixed and mobile services, public safety or emergency services, trunking for two-way radio communications, marine or rail road communications, land mobile radio (LMR®), PtP or PtMP, and P-25 applications.

L-Com's rubber duck antenna with 1.8 dBi gain has a BNC-Male-type connector. This BNC-Male-series connectorized omnidirectional antenna is 0.5 inches tall, 0.5 inches wide, and 5.9 inches long. The LCANRBD1008 VHF antenna has 360-degrees of horizontal and 90-degrees of vertical HPBW. Our high-quality antenna has a maximum input VSWR (voltage standing wave ratio) of 3:1.

L-Com's 50 Ohms impedance antenna can operate at temperatures ranging from -40 °C to 60 °C. This single-band rubber duck antenna is offered with expert technical support, PDF datasheets, and CAD drawings with dimensions and specifications. Order your 1.8 dBi VHF rubber duck antennas now and enjoy our international or domestic same-day shipping.

Configuration

Design	Rubber Duck
Application Band	VHF
Band Type	Single
Radiation Pattern	Omni Directional
Polarization	Vertical
Connector Type	BNC Male

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	139		149	MHz
Input VSWR			3:1	
Impedance		50		Ohms
Gain		1.8		dBi
Horizontal (Azimuth) HPBW		360		Degrees
Vertical (Elevation) HPBW		90		Degrees

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,
BNC-Male Connector, Vertical Polarization




LCANRBD1008

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Input Power			20	Watts

VSWR plot:

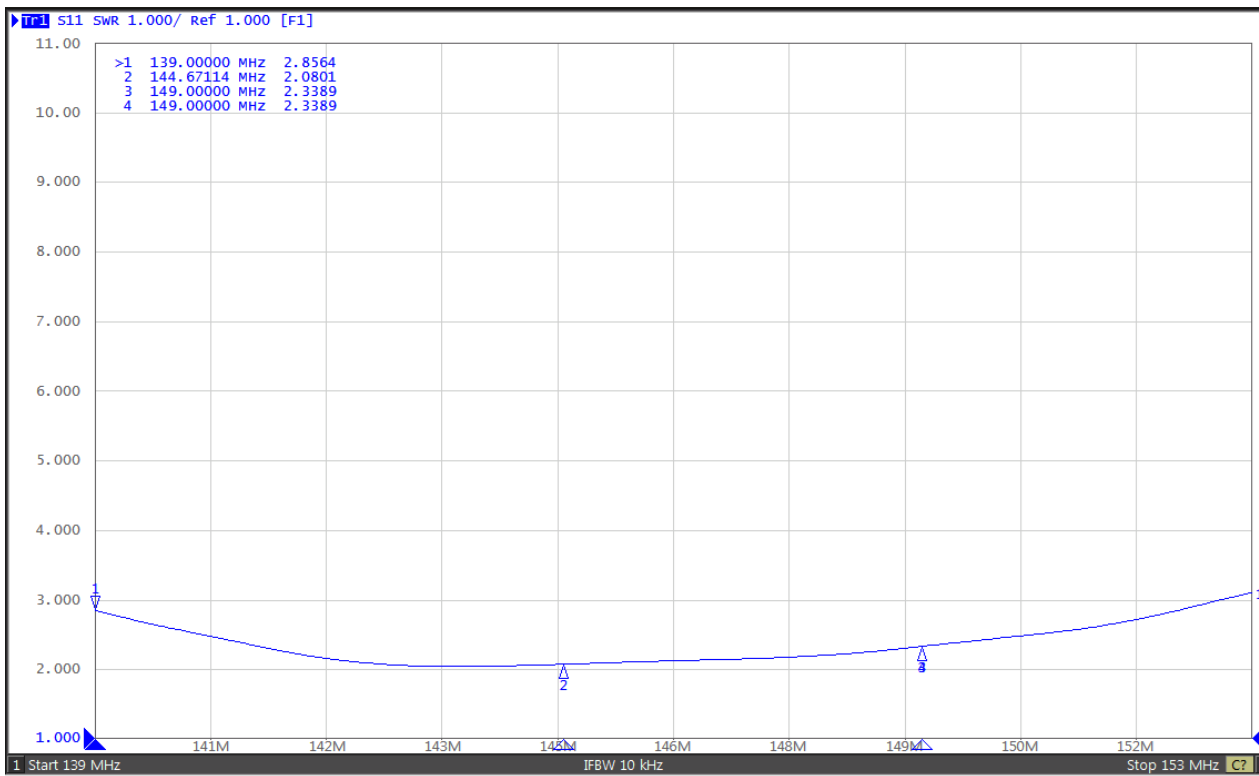

Mechanical Specifications

Radome Material	PE
Size	
Length	6.49606 in [165 mm]
Width	0.5 in [12.7 mm]
Height	0.5 in [12.7 mm]
Weight	0.048 lbs [21.77 g]

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz,
BNC-Male Connector, Vertical Polarization

LCANRBD1008



Environmental Specifications

Temperature

Operating Range

-40 to +60 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Radiation Pattern

Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.


1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz, BNC-Male Connector, Vertical Polarization from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

URL: <https://www.l-com.com/1.8-dbi-vhf-rubber-duck-antenna-139-149-mhz-bnc-j-connector-vertical-polarization-lcanrbd1008.html>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

LCANRBD1008 CAD Drawing

1.8 dBi, VHF Rubber Duck Antenna, 139-149 MHz, BNC-Male Connector, Vertical Polarization

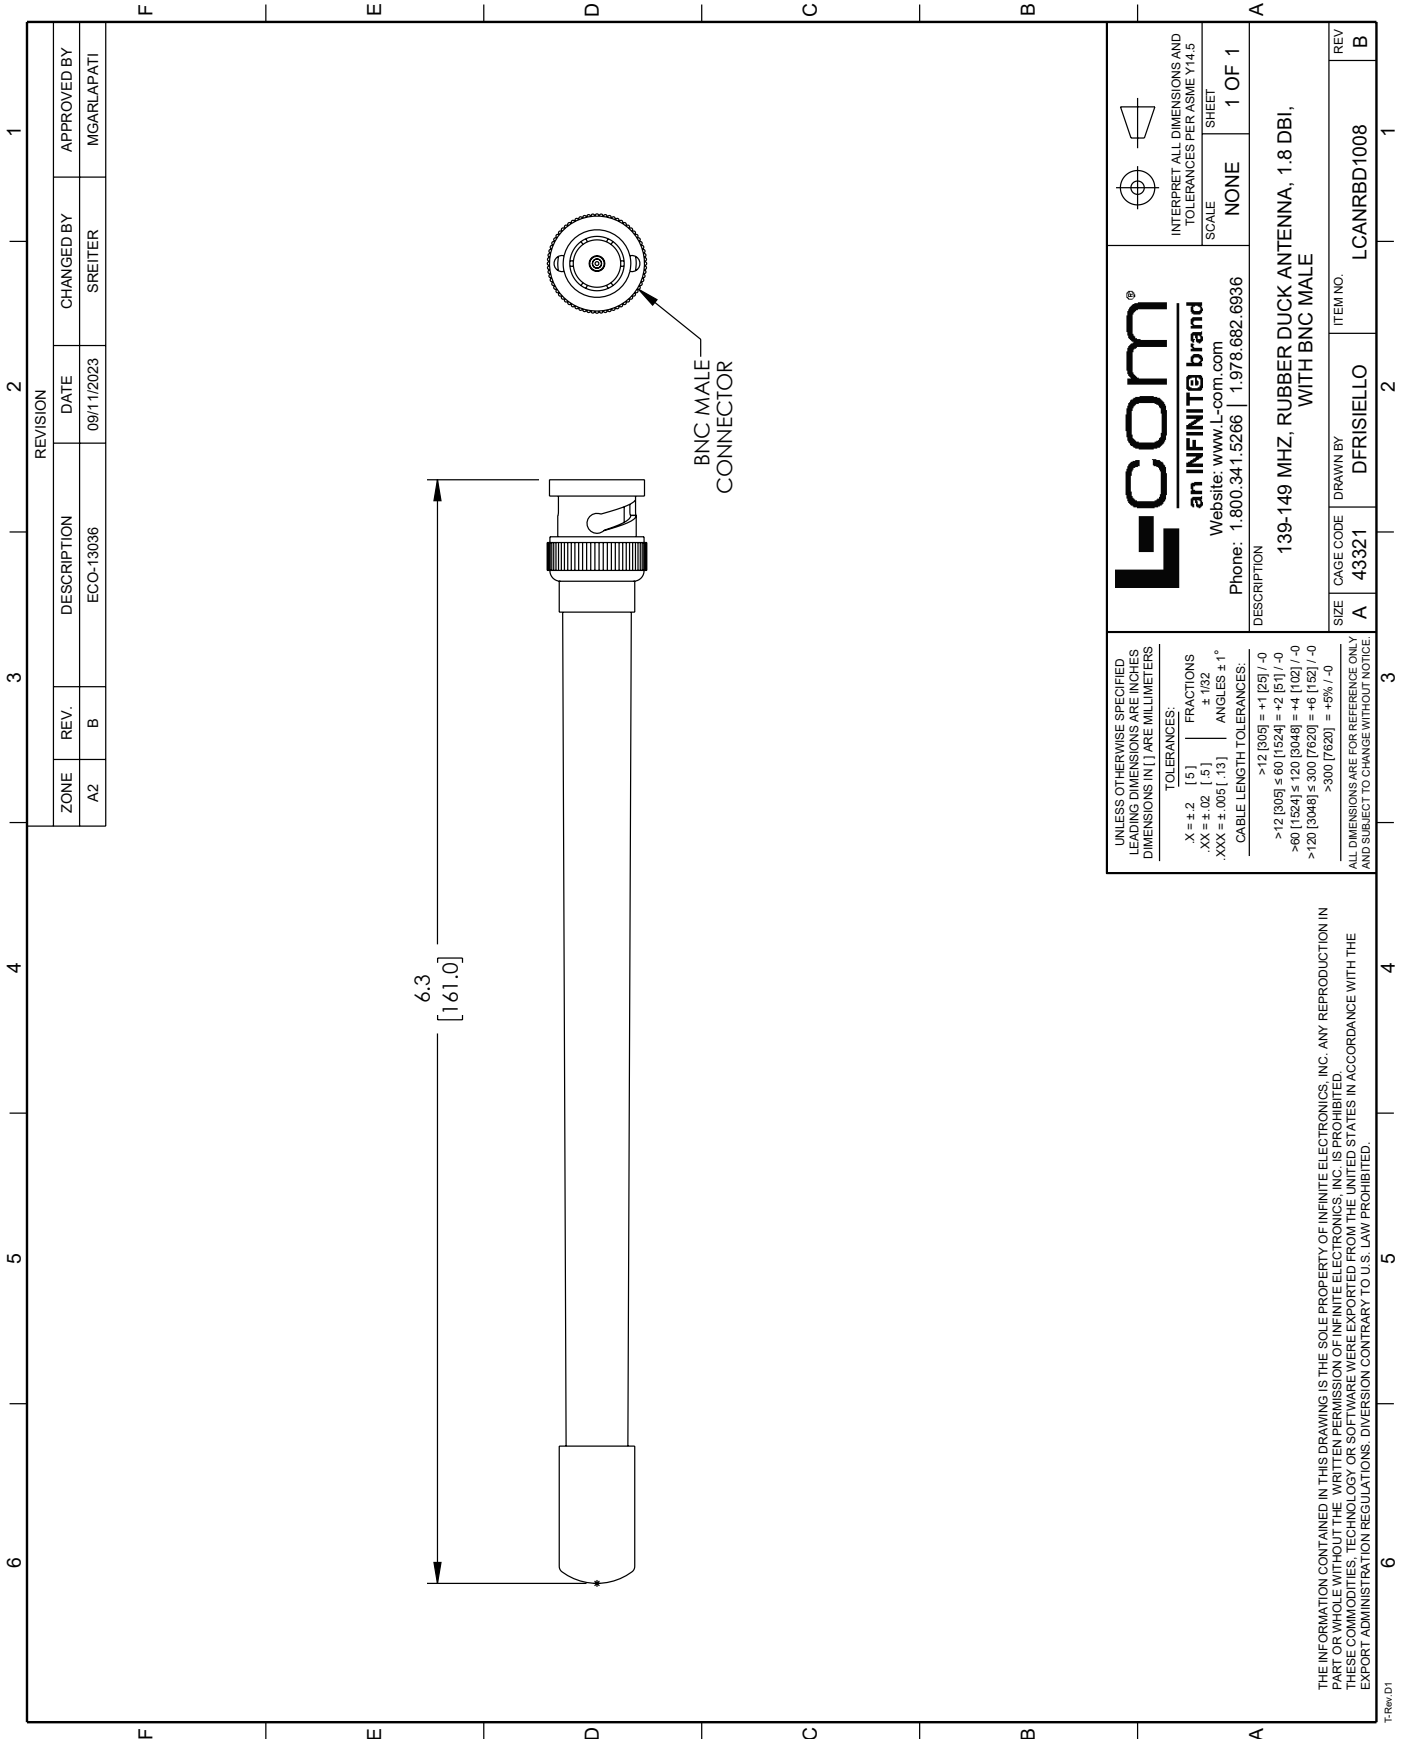

<p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <p>X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ± 1° .XXX = ±.005 [.13]</p> <p>CABLE LENGTH TOLERANCES:</p> <p>>12 [305] = +1 [25] / -0 >60 [1524] ≤ 60 [1524] = +2 [51] / -0 >120 [3048] ≤ 120 [3048] = +4 [102] / -0 >300 [7620] ≤ 300 [7620] = +8 [152] / -0 >900 [17620] = +8% / -0</p> <p>ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE</p>	<p>INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5</p> <p>SCALE NONE</p> <p>SHEET 1 OF 1</p>
	<p>L-com an INFINITE brand Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936</p>
<p>ITEM NO. LCANRBD1008</p>	<p>REV B</p>
<p>SIZE A</p>	<p>CAGE CODE 43321</p>
<p>DRAWN BY DFRISIELLO</p>	<p>1</p>

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TRev.01